

TO: STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-185-20834-00-00  
Spot: NENE Sec/Twnshp/Rge: 8-24S-12W  
4883 feet from S Section Line, 445 feet from E Section Line  
Lease Name: KNOCHE VERLE Well #: 1  
County: STAFFORD Total Vertical Depth: 4036 feet

Operator License No.: 3911  
Op Name: RAMA OPERATING CO., INC.  
Address: 101 S MAIN ST  
STAFFORD, KS 67578

String	Size	Depth (ft)	Pulled (ft)	Comments
CIBP		3800		WITH 2 SX CMT
PROD 4.5		4036	0	WITH 100 SX CMT
SURF 8.625		290		WITH 200 SX CMT <u>131.17</u>

Well Type: OIL UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 07/14/2008 11:30 AM  
Plug Co. License No.: 34069 Plug Co. Name: BASIC ENERGY SERVICES, LP  
Proposal Rcvd. from: RANDY GNIEST Company: RAMA OPERATING Phone: (620) 234-5191

Proposed Plugging Method: PLUGGING PROPOSAL SAME AS ACTUAL PLUGGING REPORT.

Plugging Proposal Received By: STEVE DURRANT Witness Type: COMPLETE (100%)  
Date/Time Plugging Completed: 07/15/2008 9:50 AM KCC Agent: RICHARD LACEY

Actual Plugging Report:

**\*\*WELL HAS BEEN USED AS AN ANNULUS DISPOSAL BY PAST OPERATORS\*\***  
SQUEEZED @ 950' WITH 150 SX CMT. SQUEEZED 2623-39' WITH 150 SX CMT. SET CIBP @ 3800' & 2 SX SX CMT. RAN TBG TO 2500' PUMPED 25 SX CMT. PULLED TBG TO 950' & PUMPED 125 SX CMT. LOST CIRCULATION. ATTEMPT TO PUMP DOWN 8 5/8" X 4 1/2" ANNULUS. BLEW OUT SURFACE PIPE. 7/15/08: TAGGED CMT AT 867'. PERFORATED AT 320'. RAN TBG TO 693'. PUMPED 75 SX CMT DOWN TBG. GOT CMT TO SURFACE. PUMPED 75 SX CMT DOWN 4 1/2" CIRCULATING UO 8 5/8".

Perfs:

Top	Bot	Thru	Comments
3858	3860		
3852	3854		
3815	3817		

**INVOICED**  
DATE 8-18-08  
INV. NO. 2009060259

RECEIVED  
KANSAS CORPORATION COMMISSION


**AUG 04 2008**

CONSERVATION DIVISION  
WICHITA, KS

Remarks: USED 60/40 POZMIX 4% GEL BY BASIC ENERGY.

Plugged through: TBG

District: 01

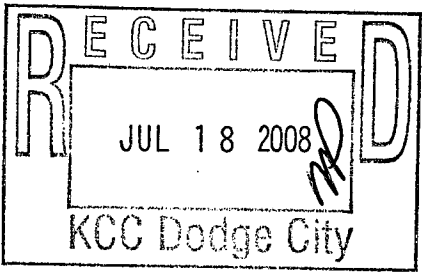

Signed Richard W. Lacey  
(TECHNICIAN)