

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-033-20267-00-00
Spot: NESE Sec/Twnshp/Rge: 12-31S-18W
2036 feet from S Section Line, 381 feet from E Section Line
Lease Name: BOOTH Well #: 1A
County: COMANCHE Total Vertical Depth: 5065 feet

Operator License No.: 3959
Op Name: SIROKY OIL MANAGEMENT
Address: PO BOX 464
PRATT, KS 67124

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	4.5	5065	2900	WITH 100 SX CMT
SURF	8.625	531		WITH 400 SX CMT

104.61

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 07/28/2008 10:00 AM
Plug Co. License No.: 33093 Plug Co. Name: GENESIS WELL SERVICE, INC.
Proposal Rcvd. from: BRIAN SIROKY Company: SIROKY OIL MGMT Phone: (620) 672-5625

Proposed Plugging Method: SET CIBP @ 5000' & 2 SX CMT. PLUG AT 1000' WITH 50 SX CMT. PLUG AT 560' WITH 50 SX CMT. PLUG AT 60-0' WITH 20 SX CMT.

Plugging Proposal Received By: STEVE DURRANT Witness Type: COMPLETE (100%)
Date/Time Plugging Completed: 07/28/2008 10:50 AM KCC Agent: ERIC MACLAREN

Actual Plugging Report:

SANDED BACK TO 4975' WITH 4 SX CMT ON TOP. 1ST PLUG AT 1000' WITH 50 SX CMT. 2ND PLUG AT 560' WITH 50 SX CMT. 3RD PLUG AT 60' WITH 20 SX CMT. CMT CIRCULATED.

Perfs:

Top	Bot	Thru	Comments
5053	5059		
5040	5050		
5028	5038		

INVOICED
DATE 8-18-08
INV. NO. 2009060263

RECEIVED
KANSAS CORPORATION COMMISSION


AUG 04 2008

CONSERVATION DIVISION
WICHITA, KS

Remarks: USED 60/40 POZMIX 4% GEL BY BASIC ENERGY.

Plugged through: TBG

District: 01

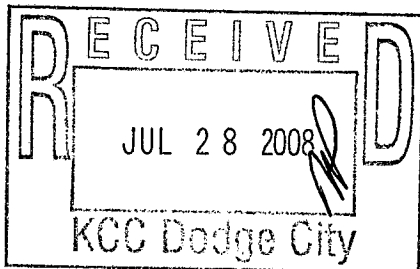

Signed Eric MacLaren
(TECHNICIAN)