

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-007-10373-00-00
Spot: NWNWSE Sec/Twnshp/Rge: 36-34S-13W
2310 feet from S Section Line, 2310 feet from E Section Line
Lease Name: STERLING BLANCHE B Well #: 5
County: BARBER Total Vertical Depth: 4874 feet

Operator License No.: 31980
Op Name: LOTUS OPERATING COMPANY, L.L.C.
Address: 100 S MAIN STE 420
WICHITA, KS 67202

String	Size	Depth (ft)	Pulled (ft)	Comments
CIBP		4750		WITH 2 SX CMT
PROD	5.5	4874	2769	WITH 150 SX CMT 158.41
SURF	8.625	301		WITH 225 SX CMT

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 07/02/2008 10:00 AM
Plug Co. License No.: 7407 Plug Co. Name: EAGLE WELL SERVICE DBA BRONCO ENERGY SERVICES
Proposal Rcvd. from: ROBIN BROWN Company: LOTUS OPERATING Phone: (316) 262-1077

Proposed Plugging Method: CIBP @ 4750' & 2 SX CMT. PLUG AT 660' WITH 50 SX CMT. PLUG AT 330' WITH 50 SX CMT. PLUG AT 60-0' WITH 20 SX CMT.

Plugging Proposal Received By: STEVE DURRANT
Date/Time Plugging Completed: 07/02/2008 11:45 AM

Witness Type: COMPLETE (100%)
KCC Agent: RICHARD LACEY

Actual Plugging Report:

CIBP @ 4750' & 2 SX CMT. SPOTTED PLUGS THROUGH TUBING. 1ST PLUG AT 650' WITH 10 SX GEL - 50 SX CMT. 2ND PLUG AT 339' WITH 50 SX CMT. 3RD PLUG AT 40' WITH 20 SX CMT.

Perfs:

Top	Bot	Thru	Comments
4812	4852		MISS


INVOICED
DATE 7-24-08
INV. NO. 2007060183

RECEIVED
KANSAS CORPORATION COMMISSION
JUL 21 2008
CONSERVATION DIVISION
WICHITA, KS

Remarks: USED 60/40 POZMIX 4% GEL BY ALLIED.

Plugged through: TBG

District: 01

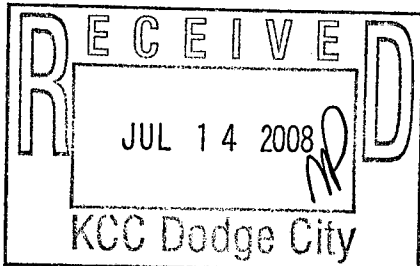

Signed

Richard W. Lacey
(TECHNICIAN)