

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-187-20422-00-01  
Spot: NESWSW Sec/Twnshp/Rge: 16-29S-39W  
980 feet from S Section Line, 980 feet from W Section Line  
Lease Name: ESSER Well #: 2-16  
County: STANTON Total Vertical Depth: 5850 feet

Operator License No.: 32309  
Op Name: PRESCO WESTERN LLC  
Address: 5665 FLATIRON PKWY  
BOULDER, CO 80301

String	Size	Depth (ft)	Pulled (ft)	Comments
CIBP		2850		WITH 4 SX CMT
CIBP		5400		WITH 4 SX CMT
DVT		2908		WITH 465 SX CMT <b>190.13</b>
PROD	5.5	5832	0	WITH 450 SX CMT
SURF	8.625	1726		

Well Type: GAS UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 07/08/2008 1:00 PM  
Plug Co. License No.: 34069 Plug Co. Name: BASIC ENERGY SERVICES, LP  
Proposal Rcvd. from: STEVE RIDENHOUR Company: PRESCO WESTERN Phone: (303) 444-8881

Proposed Plugging Method: CIBP @ 5400' WITH 4 SX CMT. CIBP @ 2850' WITH 4 SX CMT. PERFORATE AND CIRCULATE CMT TO SURFACE.

Plugging Proposal Received By: STEVE DURRANT WitnessType: COMPLETE (100%)  
Date/Time Plugging Completed: 07/09/2008 6:30 PM KCC Agent: KEN JEHLIK

Actual Plugging Report:

CIBP @ 5400' WITH 4 SX CMT. CIBP @ 2850' WITH 4 SX CMT. TEST CASING TO 500#. HOLDING OK. PERFORATE AT 700'. SPOT 50 SX CMT AT 1810'. FULL CIRCULATION. TOOH WITH TBG. CIRCULATED CASING & ANNULUS FULL WITH 150 SX CMT.

Perfs:

Top	Bot	Thru	Comments
5492	5516		
5467	5482		

**INVOICED**  
DATE 7-24-08  
INV. NO. 2009060157

RECEIVED  
KANSAS CORPORATION COMMISSION


**JUL 21 2008**

CONSERVATION DIVISION  
WICHITA, KS

Remarks: USED 60/40 POZMIX 4% GEL BY BASIC ENERGY.

Plugged through: CSG

District: 01

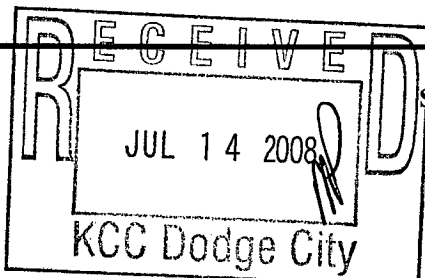

Signed

*Ken Jehlik*  
(TECHNICIAN)