

TO: STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-033-20871-00-01  
Spot: NWSWSE Sec/Twnshp/Rge: 5-34S-20W  
1100 feet from S Section Line, 2500 feet from E Section Line  
Lease Name: BLUFF CREEK Well #: 5-15  
County: COMANCHE Total Vertical Depth: 5412 feet

Operator License No.: 33770  
Op Name: ARES ENERGY, LTD  
Address: 303 W WALL STE 900  
MIDLAND, TX 79701

String	Size	Depth (ft)	Pulled (ft)	Comments
CIBP		5300		WITH 2 SX CMT
COND	20	60		
PROD	4.5	5412	2900	WITH 223 SX CMT
SURF	8.625	675		WITH 325 SX CMT

Well Type: OG UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 07/22/2008 3:45 PM  
Plug Co. License No.: 32564 Plug Co. Name: BEST WELL SERVICE, INC.  
Proposal Rcvd. from: BRIAN RAMEY Company: ARES ENERGY Phone: (432) 685-1960

Proposed Plugging Method: CIBP @ 5300' WITH 2 SX CMT. PLUG AT 700' WITH 50 SX CMT. PLUG AT 360' WITH 25 SX CMT. PLUG AT 60' WITH 20 SX CMT.

Plugging Proposal Received By: STEVE DURRANT Witness Type: COMPLETE (100%)  
Date/Time Plugging Completed: 07/24/2008 10:15 AM KCC Agent: ERIC MACLAREN

Actual Plugging Report:

SET CIBP @ 5300' WITH 2 SX CMT. 1ST PLUG AT 700'. CIRCULATE GEL & SPOTTED 60 SX CMT. 7/24/08: 2ND PLUG AT 360' WITH 50 SX CMT. 3RD PLUG AT 40' WITH 10 SX CMT. CMT CIRCULATED.

Perfs:

Top	Bot	Thru	Comments
5348	5358		


**INVOICED**  
DATE 8-18-08  
INV. NO 2009060242

RECEIVED  
KANSAS CORPORATION COMMISSION  
**AUG 04 2008**  
CONSERVATION DIVISION  
WICHITA, KS

Remarks: USED 60/40 POZMIX 4% GEL BY J & L CEMENTING SERVICES.

Plugged through: CSG

District: 01

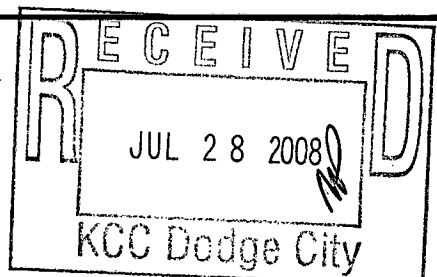

Signed Eric MacLaren  
(TECHNICIAN)

*[Handwritten signature]*  
Form CP-2