


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

NORTH

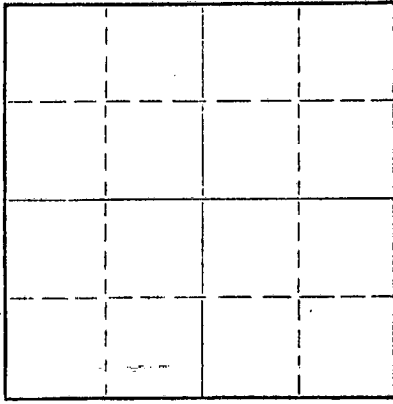

Locate well correctly on above
Section Plat

Sedgwick County. Sec. 8 Twp. 26 Rge. 2 (E) E (W)
Location as "NE/CNW&SW" or footage from lines SE SW NE
Lease Owner Kathol Petroleum, Inc.
Lease Name Myers SWD Well No. 2
Office Address Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed 19
Application for plugging filed 19
Application for plugging approved 19
Plugging commenced 2/15/68 19
Plugging completed 2/21/68 19
Reason for abandonment of well or producing formation depleted.
-If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Dewey
Producing formation Depth to top Bottom Total Depth of Well 3062 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	122'	none
				5-1/2"	3007'	2717'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Checked hole to 3062'; ran sand to 3990' and dumped 5 sacks of cement.
Shot pipe at 2730', spotted 35 barrels of oil, worked pipe loose
and pulled 84 joints. Pumped 100 sacks of cement at 200', pulled to
60' and pumped in 25 sacks of cement, ran 15 sacks of cement at 30',
loaded junk rack.

PLUGGING COMPLETE.

RECEIVED
STATE CORPORATION COMMISSION
FEB 29 1968
CONSERVATION DIVISION
Wichita, Kansas


(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor KNIGHT CASING PULLING CO., INC.
Address CHASE, KANSAS

STATE OF KANSAS, COUNTY OF RICE, ss.
NOEL J. KNIGHT (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel Knight
CHASE, KANSAS (Address)

SUBSCRIBED AND SWORN to before me this 26th day of February, 1968

My commission expires February 15, 1971
Margaret Melcher Notary Public.



FORMATION LOG

Meyers #2 Wash Down.
SE 1/4-SW 1/4-NE 1/4,
Sec. 8-26S-2E
Sedgwick County, Kansas

OPERATOR; John P. Caty

Washed out old hole to 2980 ft.

Shale	2980'	2990'
Dolomite	2990'	3000'
Mississippi Chat & Miss. Lime	3000'	3007'
Rotary T.D.	3007'		

This is a true copy of the formation log taken from daily drilling reports.

Harold Martin Drilling Co., Inc.
Contractor

COPY