

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-055-21998-00-00
Spot: E2E2SE Sec/Twnshp/Rge: 11-22S-34W
1320 feet from S Section Line, 330 feet from E Section Line
Lease Name: LARUE Well #: 11 #1
County: FINNEY Total Vertical Depth: 4900 feet

Operator License No.: 5278
Op Name: EOG RESOURCES, INC.
Address: 3817 NW EXPRESSWAY STE 500
OKLAHOMA CITY, OK 73112

String	Size	Depth (ft)	Pulled (ft)	Comments
SURF	8.625	1743		WITH 480 SX CMT

159.25

Well Type: DH UIC Docket No: _____ Date/Time to Plug: 08/05/2008 6:00 PM
Plug Co. License No.: 34000 Plug Co. Name: KENAI MID-CONTINENT, INC.
Proposal Rcvd. from: BROCK Company: EOG Phone: (580) 461-0844

Proposed Plugging Method: 1ST PLUG AT 1770' WITH 100 SX CMT. 2ND PLUG AT 1020' WITH 50 SX CMT. 3RD PLUG AT 540' WITH 40 SX CMT. 4TH PLUG AT 60' WITH 20 SX CMT. 5TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. 6TH PLUG TO CIRCULATE MOUSE HOLE WITH 10 SX CMT.

Plugging Proposal Received By: ERIC MACLAREN WitnessType: NONE
Date/Time Plugging Completed: 08/05/2008 8:30 PM KCC Agent: ERIC MACLAREN

Actual Plugging Report:

1ST PLUG AT 1770' WITH 100 SX CMT. 2ND PLUG AT 1020' WITH 50 SX CMT. 3RD PLUG AT 540' WITH 40 SX CMT. 4TH PLUG AT 60' WITH 20 SX CMT. 5TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. 6TH PLUG TO CIRCULATE MOUSE HOLE WITH 10 SX CMT.

Perfs:

INVOICED
DATE 8/29/08
INV. NO. 2002060298

RECEIVED
KANSAS CORPORATION COMMISSION


AUG 18 2008

CONSERVATION DIVISION
WICHITA, KS

Remarks: USED 60/40 POZMIX 4% GEL 1/4# FLO SEAL BY HALLIBURTON.

Plugged through: DP

District: 01

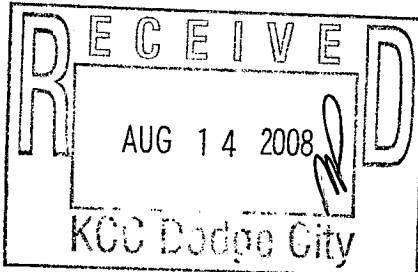

Signed Eric MacLaren
(TECHNICIAN)