

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-175-20531-00-00
Spot: NWSENW Sec/Twnshp/Rge: 3-33S-34W
3372 feet from S Section Line, 3356 feet from E Section Line
Lease Name: HITCH UNIT Well #: 1-6
County: SEWARD Total Vertical Depth: 6500 feet

Operator License No.: 4549
Op Name: ANADARKO PETROLEUM CORPORATI
Address: PO BOX 1330
HOUSTON, TX 77251

| String | Size | Depth (ft) | Pulled (ft) | Comments |
|--------|-------|------------|-------------|-----------------|
| CIBP | | 6223 | | 211.25 |
| PROD | 5.5 | 6475 | 1802 | WITH 300 SX CMT |
| SURF | 8.625 | 1642 | | WITH 800 SX CMT |

Well Type: EOR UIC Docket No: E26115.2 Date/Time to Plug: 07/24/2008 9:00 AM
Plug Co. License No.: 31151 Plug Co. Name: SARGENT AND HORTON PLUGGING, INC.
Proposal Rcvd. from: DON HORTON Company: SARGENT AND HORTON PLUGGIN Phone: (580) 854-6515

Proposed Plugging Method: PUMP 200-300# HULLS & 25 SX CMT. PLUG AT 1670' WITH 50 SX CMT. PLUG AT 600' WITH 50 SX CMT. PLUG AT 40' WITH 10 SX CMT.

Plugging Proposal Received By: ERIC MACLAREN
Date/Time Plugging Completed: 07/24/2008 4:00 PM

Witness Type: COMPLETE (100%)
KCC Agent: JACK MACLASKEY

Actual Plugging Report:

PUMP 300# HULLS & 25 SX CMT AT 6140'. 1ST PLUG AT 1670' WITH 50 SX CMT.
2ND PLUG AT 600' WITH 40 SX CMT. 3RD PLUG AT 40' WITH 10 SX CMT.

Perfs:

| Top | Bot | Thru | Comments |
|------|------|------|----------|
| 6238 | 6248 | | |
| 6140 | 6210 | | |

RECEIVED
KANSAS CORPORATION COMMISSION
AUG 13 2008
CONSERVATION DIVISION
WICHITA, KS


INVOICED

Remarks: USED COMMON CEMENT BY SARGENTS.

DATE 8/29/08
INV. NO. 2009060289

Plugged through: CSG

District: 01

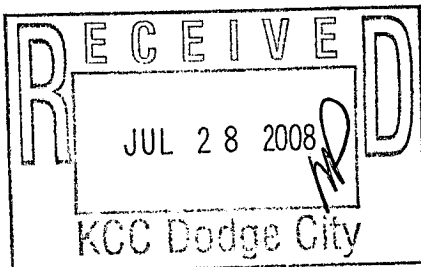

Signed

Jack MacLaskey
(TECHNICIAN)

Form CP-2/3

Handwritten signature/initials