

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-163-23721-00-00
Spot: NESENEW Sec/Twnshp/Rge: 16-7S-20W
835 feet from N Section Line, 2395 feet from W Section Line
Lease Name: ROSS UNIT Well #: 1
County: ROOKS Total Vertical Depth: 3650 feet

Operator License No.: 31569
Op Name: BACH, JASON DBA BACH OIL PRODUC
Address: PO BOX 723
ALMA, NE 68920

String	Size	Depth (ft)	Pulled (ft)	Comments
SURF	8.625	205		150 SX COMMON CMT 3% CC, 2% GEL

118.63

Well Type: DH UIC Docket No: _____ Date/Time to Plug: 05/13/2008 8:00 PM
Plug Co. License No.: 33493 Plug Co. Name: AMERICAN EAGLE DRILLING LLC
Proposal Rcvd. from: DON Company: BACH OIL PRODUCTION Phone: (785) 303-0377

Proposed Plugging Method: Ordered 215 sxs 60/40 pozix - 4% gel with 1/4# flocele per sack.
Space all plugs with heavy drilling mud through drill pipe.

Plugging Proposal Received By: DAVID WANN WitnessType: NONE
Date/Time Plugging Completed: 05/13/2008 10:00 PM KCC Agent: DAVID WANN

Actual Plugging Report:

1st. Plug at 3593' w/25 sxs.
2nd. Plug at 1690' w/25 sxs.
3rd. Plug at 1020' w/100 sxs.
4th. Plug at 250' w/40 sxs.
5th. Plug at 40' w/10 sxs.
Rathole with 15 sxs.

Perfs:

INVOICED
DATE 8/29/08
INV. NO. 2009060290

RECEIVED
KANSAS CORPORATION COMMISSION

AUG 15 2008


CONSERVATION DIVISION
WICHITA, KS

Remarks: ALLIED CEMENTING COMPANY.

Plugged through: DP

District: 04

Signed

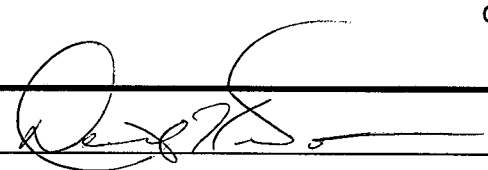

(TECHNICIAN)

CM

AUG 13 2008

PKT