

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-007-22792-00-00
Spot: SENE Sec/Twnshp/Rge: 24-32S-12W
1980 feet from N Section Line, 660 feet from E Section Line
Lease Name: KREHBIEL-NICHOLS Well #: 1
County: BARBER Total Vertical Depth: 4645 feet

Operator License No.: 3532
Op Name: CMX, INC.
Address: 1551 N WATERFRONT PKWY STE 150
WICHITA, KS 67206

String	Size	Depth (ft)	Pulled (ft)	Comments
CIBP		3457		WITH 2 SX CMT
PROD	5.5	3730	2400	WITH 150 SX CMT 150.96
SURF	10.75	346		WITH 325 SX CMT

Well Type: OG UIC Docket No: _____ Date/Time to Plug: 08/22/2008 9:30 AM
Plug Co. License No.: 5105 Plug Co. Name: CLARKE CORPORATION
Proposal Rcvd. from: MARK MORGERSTERN Company: CLARKE CORPORATION Phone: (620) 886-5665

Proposed Plugging Method: CIBP @ 3457' & 2 SX CMT. PLUG AT 600' WITH 10 SX GEL & 50 SX CMT. PLUG AT 370' WITH 75 SX CMT. PLUG AT 60' WITH 30 SX CMT.

Plugging Proposal Received By: STEVE PFEIFER WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 08/22/2008 10:15 AM KCC Agent: STEVE PFEIFER

Actual Plugging Report:

SET CIBP@ 3457' & PUT 2 SX CMT ON TOP OF CIBP THROUGH DUMP BAILER. LAY DOWN 5 1/2" CASING & RUN 2 3/8" TBG IN TO PLUG THROUGH. 1ST PLUG AT 600' WITH 10 SX GEL & 50 SX CMT. 2ND PLUG AT 370' WITH 75 SX CMT. 3RD PLUG AT 60' WITH 30 SX CMT.

Perfs:

Top	Bot	Thru	Comments
3514	3525		


INVOICED
DATE 9/15/08
INV. NO. 2009060349

RECEIVED
KANSAS CORPORATION COMMISSION
AUG 27 2008

Remarks: USED 60/40 POZMIX 4% GEL BY ALLIED.

Plugged through: TBG

District: 01

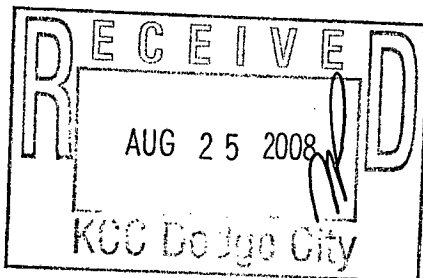

Signed

Stephen J. Pfeifer
(TECHNICIAN)