

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-135-24340-00-00
Spot: N2N2SW Sec/Twnshp/Rge: 5-16S-21W
2350 feet from S Section Line, 1210 feet from W Section Line
Lease Name: PAULA Well #: 1
County: NESS Total Vertical Depth: 4360 feet

Operator License No.: 5663
Op Name: HESS OIL COMPANY
Address: PO BOX 1009
MCPHERSON, KS 67460

| String | Size | Depth (ft) | Pulled (ft) | Comments |
|--------|-------|------------|-------------|-------------------------------|
| DVT | | 1665 | | |
| PROD | 5.5 | 4360 | 0 | WITH 350 SX CMT 141.70 |
| SURF | 8.625 | 209 | | WITH 160 SX CMT |

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 08/05/2008 1:00 PM
Plug Co. License No.: 5663 Plug Co. Name: HESS OIL COMPANY
Proposal Rcvd. from: ARNOLD HESS Company: HESS OIL COMPANY Phone: (785) 731-5615

Proposed Plugging Method: PUMP 40 SX CMT & 150# HULLS - GEL SPACER TO ANHYDRITE - CMT TO SURFACE. USE 50 SX CMT FOR BACKSIDE.

Plugging Proposal Received By: MICHAEL MAIER
Date/Time Plugging Completed: 08/05/2008 3:00 PM

WitnessType: COMPLETE (100%)
KCC Agent: MICHAEL MAIER

Actual Plugging Report:

PUMP 40 SX CMT & 200# HULLS, 15 SX GEL AND 170 SX CMT. MAXIMUM PRESSURE 1150#. SHUT IN PRESSURE 500#. TIED ONTO BACKSIDE & PUMPED 25 SX CMT. PRESSURED TO 500# & HELD.

Perfs:

| Top | Bot | Thru | Comments |
|------|------|------|----------|
| 4280 | 4284 | | |


INVOICED
DATE 9/15/08
INV. NO. 2009060362

RECEIVED
KANSAS CORPORATION COMMISSION
AUG 29 2008
CONSERVATION DIVISION
WICHITA, KS

Remarks: USED 60/40 POZMIX 4% GEL BY SWIFT SERVICES.

Plugged through: CSG

District: 01

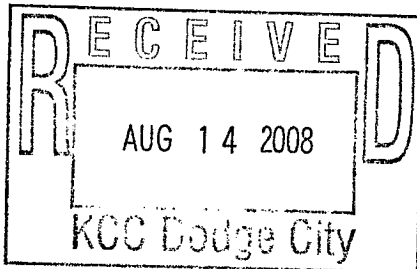

Signed

Michael Maier

(TECHNICIAN)