

AP


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

NORTH

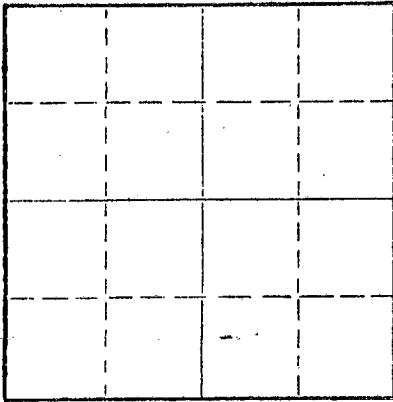

Locate well correctly on above
Section Plat

Butler County, Sec. 11 Twp. 26S Rge. 3 (E) ~~XXX~~

Location as "NE/CNW/SW" or footage from lines NW NW SE

Lease Owner Oilfield Supply & Trading, Inc.

Lease Name McCune Well No. 1

Office Address 430 Greenwood, Wichita, Kansas 67211

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed July 10 19 70

Application for plugging filed 10-23 19 70

Application for plugging approved 10-26 19 70

Plugging commenced 11-2 19 70

Plugging completed 11-4 19 70

Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production None 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Ted E. Dewey

Producing formation Mississippi Depth to top 2751 Bottom 2753 Total Depth of Well 2753 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Mississippi	Oil & water	2751	2753	8-5/8	200'	None
				4-1/2"	2751	2310'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Sand to 2740 - dump 4 sax cement - pull slips - work pipe - shoot @ 2366 - work pipe - shoot @ 2305 - pull 70 joints 4-1/2" pipe - total 2310'

Bail hole to 220 ft. - rock bridge to 200 ft. - dump 3 yds ready mix to surface - tear down.

12-2-70
RECEIVED
STATE CORPORATION COMMISSION
DEC 2 - 1970
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Ralph Comstock

Address 320 North Park, Stafford, Kansas 67578

STATE OF Kansas, COUNTY OF Sedgwick, ss.

I, W. R. Justice, (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God


(Signature) W. R. Justice

W. R. Justice
430 Greenwood, Wichita, Kansas 67211
(Address)

SUBSCRIBED AND SWORN to before me this 13th day of November, 19 70

Ethel Spicer
Ethel Spicer

My commission expires May 14, 1972



TRIANGLE DRILLING

324 North Orchard
EL DORADO, KANSAS

R

To Oil Field Supply & Trading Inc.

Invoice No. _____

430 Greenwood

Date June 27, 1970

Wichita, Kansas

For Month Of _____

Lease McCune NW 1/4 SE 11-26-3E Butler County, Kansas

RECEIVED
STATE CORPORATION COMMISSION
OCT 26 1970
CONSERVATION DIVISION
Wichita, Kansas

WELL LOG

0	-----	25	Soil & Clay
25	-----	508	Lime and Shale
598	-----	1385	Shale and Lime
1305	-----	1660	Lime and Shale
1660	-----	1740	Shale and Lime stks.
1740	-----	2485	Lime and Shale
2485	-----	2535	Shale and Lime
2535	-----	2720	Lime and Shale
2720	-----	2753	Lime, Misc R.T.D.