

15-065-20428-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

Graham County. Sec. 2 Twp. 10 Rge. 24 (E) (W)

Location as "NE/CNW&SW" or footage from lines. NE SE NW

Lease Owner Don Pratt Oil Operations

Lease Name O. Nicholson #3 Well No. _____

Office Address Drawer 370, Hays, Kansas 67601

Character of Well (completed as Oil, Gas or Dry Hole) _____

Date well completed _____ 19__

Application for plugging filed _____ 19__

Application for plugging approved _____ 19__


Plugging commenced 10/26/71 _____ 19__

Plugging completed 10/28/71 _____ 19__

Reason for abandonment of well or producing formation depleted.

If a producing well is abandoned, date of last production _____ 19__

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

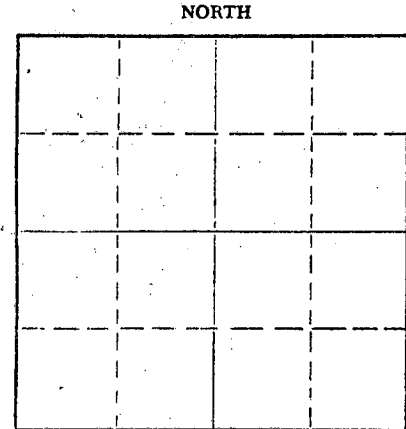

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Nichols

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4100 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS


CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				<u>8-5/8</u>	<u>203</u>	<u>none</u>
				<u>4 1/2"</u>	<u>4100</u>	<u>2532'</u>

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Checked hole, sanded to 3850' and set 3 sacks of cement. Loaded casing with water, shot pipe at 2835', 2740', 2646', 2550', pulled pipe. Pumped 5 sacks hulls, 15 sacks gel, 100 sacks cement, 15 sacks gel and 50 sacks cement.

PLUGGING COMPLETE.

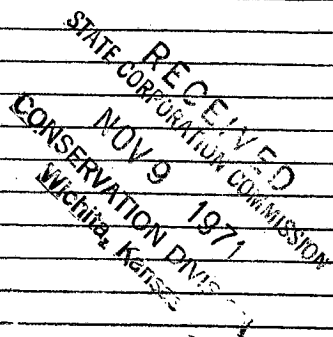


Name of Plugging Contractor KNIGHT CASING PULLING CO., INC.
Address CHASE, KANSAS

STATE OF KANSAS COUNTY OF RICE, ss. NOEL J. KNIGHT (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel Knight
CHASE, KANSAS

Subscribed and Sworn to before me this 30th day of October, 19 71



Margaret Melcher
Notary Public.

DREILING OIL, INC.

Victoria, Kansas 67671

15-065-20428-00-00

WELL LOG

Company	Don E. Pratt Oil Operations P. O. Drawer 370 Hays, Kansas 67601	Sec. 2	Twp. 10	Rng. 24	
Farm	O. Nickelson No. 3	Location	NE SE NW		
Total Depth	4107'	County	Graham		
Comm.	4-7-71 Comp. 4-13-71	Elevation:	2503'	K. B.	
Contractor	Dreiling Oil, Inc. Victoria, Kansas 67671		2500'	D. F.	
			2498'	G. R.	

Casing Record	Cement Record	Production:
203' - 8 5/8"	160 sacks cement	
4100.36' - 4 1/2"	225 sacks common 2% quick set salt saturated cement	


Figures Indicate Bottom of Formations

0' 140' 203' 280' 1250' 1675' 1885' 2130' 2133' 2168' 2510' 2765' 2792' 2975' 3235' 3405' 3620' 3808' 3885' 3905' 3930' 3980' 4042' 4067' 4080' 4107'	140' 203' 280' 1250' 1675' 1885' 2130' 2133' 2168' 2510' 2765' 2792' 2975' 3235' 3405' 3620' 3808' 3885' 3905' 3930' 3980' 4042' 4067' 4080' 4107' T.D.	Top Soil, Sand & Clay Blue Shale Shale Shale Shale Sand Shale Shale Anhydrite Shale Shale Shale Shale & Lime Shale & Lime Shale & Lime Shale & Lime Lime & Shale Lime & Shale Lime Lime Lime Lime Lime Lime Lime Lime
--	--	--


RECEIVED
 STATE CORPORATION COMMISSION
 MAP 2 1972
 CONSERVATION DIVISION
 Wichita, Kansas


STATE OF KANSAS)
)ss
 COUNTY OF ELLIS)

I, Leo F. Dreiling, of Dreiling Oil, Inc., upon oath states that the above and foregoing is a true and correct copy from the Daily Drilling Report from O. Nickelson #3.


 LEO F. DREILING

Subscribed and sworn to before me this 15th day of April, 1971.




 PATTY DREILING NOTARY PUBLIC

My commission expires: January 13, 1975