


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Graham County. Sec. 5 Twp. 9S Rge. 23W (E) (W)
Location as "NE/CNW/SW" or footage from lines NE NE NW
Lease Owner Imperial Oil of Kansas, Inc.
Lease Name Staggers Well No. 2
Office Address 780 Fourth National Bldg., Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed February 24, 1958
Application for plugging filed February 24, 1958
Application for plugging approved February 24, 1958
Plugging commenced February 24, 1958
Plugging completed February 24, 1958
Reason for abandonment of well or producing formation No commercial quantities of oil found.
If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

NORTH

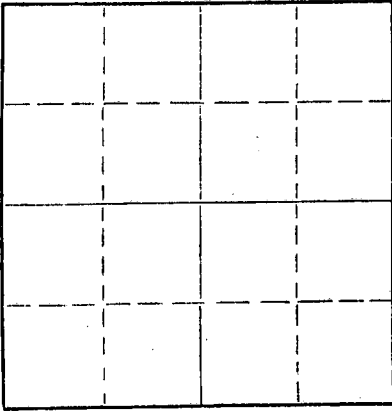

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Mr. A. D. Fabricius, Hill City, Ks.
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3875 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	2-13-58	


Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plugged hole at 550 feet with
25 sacks cement. Set No. 2 plug
at 220' with 15 sacks, No. 3 plug
at 40' with 10 sacks.

RECEIVED
STATE CORPORATION COMMISSION
3-28-58
MAR 23 1958
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Imperial Oil of Kansas, Inc.
Address 780 Fourth National Bldg., Wichita, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
Raymond L. Bacon (employee of ~~Imperial Oil of Kansas, Inc.~~ of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God. IMPERIAL OIL OF KANSAS, INC.
(Signature) By: Ray L. Bacon V-P
780 Fourth National Bldg., Wichita 2, Kansas
(Address)



Subscribed and sworn to before me this 27th day of March, 1958
Luetta M. Duncan
Notary Public.

PLUGGING
FILE SEC _____ T _____ R _____
BOOK PAGE _____ LINE _____

DRILLER'S LOG

Imperial Oil of Kansas, Inc.
780 Fourth National Building
Wichita 2, Kansas

Staggers No. 2
NE NE NW Sec. 5-9S-23W
Graham County, Kansas

Total Depth: 3875

Elevation: 2322' RB

Commenced: 2-13-58 Completed: 2-24-58

Production: D & A

Contractor: Imperial Oil of Kansas, Inc.
Wichita, Kansas

Casing Record: Set 8-5/8" Surface Pipe at 216' with 150 sacks cement.


Figures indicate bottom of formations:

			<u>TOPS</u>	
Shale & Surface Clay	215'			
Shale	750'	Anhydrite	1975'	(-347)
Shale & Sand	980'	Heebner	3605'	(-1283)
Shale & Shells	1480'	Toronto	3627'	(-1305)
Dakota Sand	1700'	Lansing	3646'	(-1324)
Shale & Shells	1975'	Base Kansas City	3868'	(-1546)
Anhydrite	2011'	Rotary Total Depth	3875'	(-1553)
Shale & Shells	2280'			
Shale & Lime	3335'			
Lime	3875'			
Total Depth	3875'			

We hereby certify this to be a correct and accurate log of the above described well as shown on the daily drilling reports.

IMPERIAL OIL OF KANSAS, INC.

By: Ray E. Brown
Vice-President



Subscribed and sworn to before me this 27th day of March, 1958.
My Commission Expires:
December 19, 1960

Louella M. Success
Notary Public

PLUGGING
FIL SEC _____ T _____ R _____
BOOK PAGE _____ LINE _____

RECEIVED
STATE CORPORATION COMMISSION

MAR 28 1958

CONSERVATION DIVISION
Wichita, Kansas