

\*Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

WELL PLUGGING RECORD

Graham County. Sec. 4 Twp. 10S Rge. 22 (E) (W)

Location as "NE/CNW/SW" or footage from lines SE NW NE

Lease Owner V. E. Autry

Lease Name McElroy Well No. 1

Office Address 4360 Livingston Ave., Dallas, Texas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed November 12, 1965 19

Application for plugging filed November 15, 1965 19

Application for plugging approved November 12, 1965 19


Plugging commenced November 12, 1965 19

Plugging completed November 12, 1965 19

Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

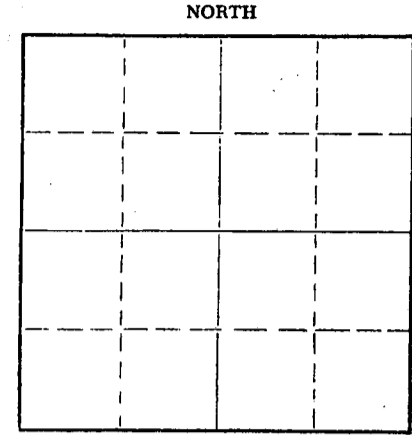

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Gilbert Leiker

Producing formation Depth to top Bottom Total Depth of Well 3819 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Surface Pipe		0	228'	8 5/8"	11-6-65	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole with heavy mud to 540'; set plug with 20 sacks cement. Mud to 210'; set plug with 20 sacks of cement. Mud to 40'; set plug with 10 sacks of cement.

RECEIVED  
STATE CORPORATION COMMISSION

NOV 16 1965  
11-16-1965  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor D & D Drilling Company, Inc.

Address 307 Schweiter Building, Wichita, Kansas

STATE OF Kansas COUNTY OF Sedgwick ss. James R. Daniels (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) James R. Daniels  
James R. Daniels  
307 Schweiter Bldg., Wichita, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this 15th day of November, 1965

Colleen Chapple  
Colleen Chapple Notary Public.



15-065-30139-00-00

ROTARY DRILLING LOG

OPERATOR: V. E. Autry  
 CONTRACTOR: D & D Drilling Co., Inc.  
 WELL: McElroy #1  
 LOCATION: SE NW NE  
 Sec. 4-T10S-R22W  
 COUNTY: Graham, Kansas

ELEVATION: 2373' KB  
 2370 DF  
 2368' GL  
 COMMENCED: 11-6-65  
 COMPLETED: 11-12-65

**RECEIVED**  
 STATE CORPORATION COMMISSION  
 11-18-1965  
 NOV 18 1965  
 CONSERVATION DIVISION  
 WICHITA, KANSAS

FORMATIONS	DEPTH	REMARKS
Sand & Shale	228"	Ran 5 joints of 8 5/8" surface casing, set at 228' with 190 sacks cement. Cement Circulated.
Shale	280'	
Shale & Sand	1300'	
Shale	1890'	
Anhydrite	1927'	
Shale	2660'	
Lime & Shale	3400'	D & A
Lime	3819'	
Rotary Total Depth	3819'	

T O P S

ANHY	1890
Top	3362
Heeb	3582
Tor	3603
Lans	3619

light stain dead oil  
 3655-59  
 No test, NO log.

A F F I D A V I T

State of Kansas )  
 ) SS  
 County of Sedgwick )

I, James R. Daniels, of lawful age, being duly and solemnly sworn on oath says: I am a resident of Wichita, Sedgwick County, Kansas, and I hereby know and on oath state that the above drilling log is true and correct to the best of my knowledge and belief.

*James R. Daniels*  
 James R. Daniels

Subscribed and sworn to before me this 15th day of November, 1965.

My Commission Expires:  
 11-19-66

*Colleen Chapple*  
 Colleen Chapple - Notary Public

