


15-065-19181-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

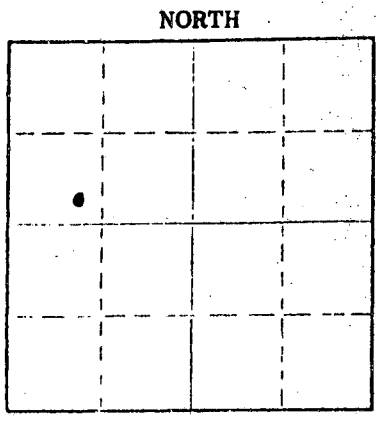

Locate well correctly on above Section Plat

Graham County, Sec. 34 Twp. 10 Rge. 21 (●) (W)
Location as "NE/CNWSW" or footage from lines. SE SW NW
Lease Owner Nadel and Gussman
Lease Name Rathbun Well No. 1
Office Address 3232 First National Tower - Tulsa, Okla. 74103
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed 4-15 1964
Application for plugging filed 2-3 1976
Application for plugging approved 2-5 1976
Plugging commenced 2-14 1976
Plugging completed 2-14 1976
Reason for abandonment of well or producing formation Depleted

If a producing well is abandoned, date of last production 1975
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Balthazor
Producing formation Lansing-K.C. Depth to top 3540 Bottom 3580 Total Depth of Well 3828 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Lans-K.C.	Oil	3540	3580	5-1/2	3811	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from 3500 feet to 3620 feet for each plug set.

Plug back to 3500' w/sand, mixed 130 sx 50/50 Pos w/25 sx gell & 3 sx hulls. Well squeezed.

RECEIVED
STATE CORPORATION COMMISSION

MAY 21 1976
05-21-1976


Name of Plugging Contractor Allied Cementing Co.
Address P.O. Box 31 Russell, Kansas 67665

STATE OF OKLAHOMA COUNTY OF TULSA ss.
M. R. Taylor (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) M R Taylor
3232 First National Tower - Tulsa, Okla. 74103 (Address)

My commission expires May 11, 1979
I have sworn to before me this 19th day of May, 1976



Mildred Carter
Mildred Carter Notary Public.

15-065-19181-00-00
ROTARY DRILLING LOG

OPERATOR: D & D Drilling Co., Inc., & COMM: 3-19-64
Nadel & Gussman COMP: 3-21-64
CONTRACTOR: D & D Drilling Company, Inc.
WELL: Rathbun No. 1
SE SW NW Sec. 34-10S-21W
Graham County, Kansas

Formations	Depth	Remarks
Sand & Shale	241'	Set 11 joints of 8 5/8" surface casing at 241', cemented with 190 sacks of HA-5.
Shale	800'	
Shale & Sand	1350'	
Shale - Red Bed	1668'	
Anhy.	1733'	
Shale & Shell	1815'	
Shale	2300'	
Lime & Shale	3375'	
Lime	3827'	
Rotary Total Depth	3827'	Set 119 joints of 5 1/2" casing at 3811', cemented with 150 sacks Salt saturated and 25 sacks latex.

A F F I D A V I T

State of Kansas)
) SS
County of Sedgwick)

James R. Daniels, of lawful age, being duly and solemnly sworn on oath says: I am a resident of Wichita, Sedgwick County, Kansas and I hereby know and on oath state, the above drilling log covering the Rathbun No. 1 located in the SE SW NW of Section 34-10S-21W, Graham County, Kansas is true and correct to the best of my knowledge and belief. Further affiant saith not.

D & D Drilling Company, Inc.

James R. Daniels
James R. Daniels

Subscribed and sworn to before me this 28th day of April, 1964.

My commission expires ~~11-18-66~~

Colleen Chapple
Colleen Chapple - Notary Public

RECEIVED
STATE CORPORATION COMMISSION

FEB 5 1976
02-05-1976
CONSERVATION DIVISION
Wichita, Kansas