

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-075-10023-00-00
Spot: NWSE Sec/Twnshp/Rge: 33-21S-41W
1980 feet from S Section Line, 1980 feet from E Section Line
Lease Name: HCU Well #: 3311
County: HAMILTON Total Vertical Depth: 2810 feet

Operator License No.: 33999
Op Name: LINN OPERATING, INC.
Address: 600 TRAVIS STE 7000
HOUSTON, TX 77002
OKC OK 73134

*Attn Rena Carter
14000 Qual Springs
Parkway
Ste 5000*

String	Size	Depth (ft)	Pulled (ft)	Comments
CIBP		1250		WITH 2 SX CMT
CIBP		2720		WITH 2 SX CMT
PROD 4.5		2810	0	WITH 100 SX CMT
SURF 8.625		205		WITH 150 SXC MT

91.33

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 08/06/2005 9:00 AM
Plug Co. License No.: 31529 Plug Co. Name: MIKE'S TESTING & SALVAGE, INC.
Proposal Rcvd. from: CURTIS KELSO Company: MIKE'S TESTING & SALVAGE, INC. Phone: (620) 938-2537

Proposed Plugging Method: PLUGGING PROPOSAL SAME AS ACTUAL PLUGGING REPORT

Plugging Proposal Received By: STEVE DURRANT WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 08/13/2008 1:30 PM KCC Agent: KEN JEHLIK

Actual Plugging Report:

1ST PLUG SET CIBP @ 2720' & 2 SX CMT. 8/6/08: 2ND PLUG SET CIBP @ 1250' & 2 SX CMT. TESTED CASING. PUMPED 30 BBLS @ 1.5 BPM @ 50 PSI. 8/12/08: RAN COLLAR LOG & GAMMA RAY FROM 1250-0'. COULD NOT DETERMINE CONDITION OF CASING. RIG UP TBG & PIPE. TEST CASING FROM 1250-300' CONDITION GOOD. 300-0' POOR CONDITION. PERFORATE 3 HOLES @ 1200'. SET CMT RETAINER AT 1160'. RATE 1.2 BPM @ 1000#. MIXED & PUMPED 75 SX CMT. SHUT IN PRESSURE @ 800#. 3RD PLUG PERFORATE AT 930'. SET RETAINER AT 860'. RATE 2 BPM @ 700#. MIX & PUMP 80 SX CMT. NO BLOW ON ANNULUS. PULL OUT OF RETAINER- PUMP 30 SX CMT. FILL 4 1/2" TO 300'. 4TH PLUG RUN 1" TO 282' - INSIDE 4 1/2" X 8 5/8" ANNULUS. CIRCULATED CMT TO SURFACE WITH 100 SX CMT. 5TH PLUG RUN 1" TO 282' INSIDE 4 1/2" CIRCULATE CMT TO SURFACE WITH 30 SX CMT.

Perfs:

Top	Bot	Thru	Comments
2771	2773		


INVOICED
DATE 9/24/08
INV. NO. 2009060442

RECEIVED
KANSAS CORPORATION COMMISSION
SEP 05 2008

Remarks: USED 60/40 POZMIX 4% GEL BY COPELAND.

Plugged through: TBG

District: 01

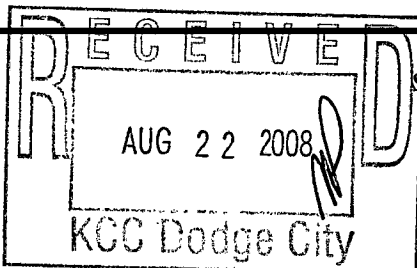

Signed [Signature]
(TECHNICIAN)

Form CP-273
[Signature]
PKT