

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-187-20805-00-00
Spot: NWSW Sec/Twnshp/Rge: 36-29S-40W
2300 feet from S Section Line, 660 feet from W Section Line
Lease Name: WADE ALLEN Well #: 1-36
County: STANTON Total Vertical Depth: 5750 feet

Operator License No.: 32309
Op Name: PRESCO WESTERN LLC
Address: 5665 FLATIRON PKWY
BOULDER, CO 80301

String	Size	Depth (ft)	Pulled (ft)	Comments
CIBP		2800		WITH 2 SX CMT
CIBP		5600		WITH 2 SX CMT
PROD	4.5	5749	0	WITH 550 SX CMT
SURF	8.625	1579		

186.88

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 08/23/2008 10:00 AM
Plug Co. License No.: 34069 Plug Co. Name: BASIC ENERGY SERVICES, LP
Proposal Rcvd. from: JOE ARJONA Company: PRESCO WESTERN Phone: (303) 444-8881

Proposed Plugging Method: CIBP @ 5600' WITH 2 SX CMT. CIBP @ 2800' WITH 2 SX CMT. PERFORATE @ 600'. CIRCULATE CMT UP 8 5/8". PRESSURE UP. RUN TBG. FILL & SQUEEZE. PRESSURE UP 8 5/8" X 4 1/2" CASING.

Plugging Proposal Received By: RICHARD LACEY WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 08/23/2008 2:00 PM KCC Agent: JACK MACLASKEY

Actual Plugging Report:

1ST PLUG CIBP @ 5600' WITH 2 SX CMT. 2ND PLUG CIBP @ 2800' WITH 2 SX CMT. 3RD PLUG PERFORATE 4 1/2" WITH 4 SPF. PRESSURED TO 1000 PSI. PRESSURE DROP 25# MINUTE. VERY SLIGHT VACUUM ON ANNULAR. RIHW TBG & SPOTTED 75 SX CMT AT 600'. CIRCULATE CMT TO SURFACE. 0 SX CMT DOWN ANNULAR.

Perfs:

Top	Bot	Thru	Comments
3187	3198		
3090	3100		
3033	3036		
2958	2968		
2900	2907		

INVOICED
DATE 9/24/08
INV. NO. 2008060464

RECEIVED
KANSAS CORPORATION COMMISSION


SEP 05 2008

CONSERVATION DIVISION
WICHITA, KS

Remarks: USED 60/40 POZMIX 4% GEL BY BASIC.

Plugged through: TBG

District: 01

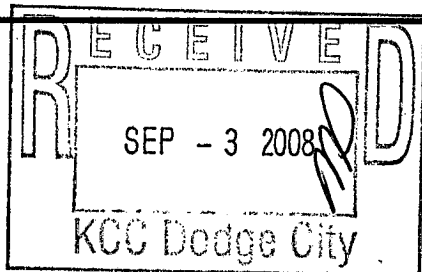

Signed

Jack MacLash
(TECHNICIAN)