

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-185-12873-00-00
Spot: SWSESW Sec/Twnshp/Rge: 15-22S-14W
330 feet from S Section Line, 3630 feet from E Section Line
Lease Name: OSCAR WEST Well #: 201
County: STAFFORD Total Vertical Depth: 3713 feet

Operator License No.: 33809
Op Name: BELPORT OIL, INC.
Address: 1443 S NORFOLK AVE
TULSA, OK 74120

String	Size	Depth (ft)	Pulled (ft)	Comments
CIBP		3535		
PROD	5.5	3713	0	WITH 125 SX CMT <u>120.67</u>
SURF	8.625	404		WITH 300 SX CMT

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 08/26/2008 10:30 AM
Plug Co. License No.: 7023 Plug Co. Name: KLIMA WELL SERVICE, INC.
Proposal Rcvd. from: GEORGE DAVENPORT Company: BELPORT OIL Phone: (918) 584-8989

Proposed Plugging Method: PLUGGING PROPOSAL SAME AS ACTUAL PLUGGING.

Plugging Proposal Received By: RICHARD LACEY WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 08/26/2008 12:00 PM KCC Agent: RICHARD LACEY

Actual Plugging Report:

SET CIBP @ 3535'. OPERATOR REPORTED 5 1/2" CASING HAD HOLES FROM 450-600'. CASING TESTED OUT WITH CMT TO 500 PSIG. RAN TBG TO 700'. PUMPED 85 SX CMT. CIRCULATED CMT TO SURFACE UP 5 1/2" CASING. PRESSURED CASING TO 500 PSIG. PULLED TBG. PUMPED DOWN 8 5/8" X 5 1/2" WITH 150 SX CMT. MAXIMUM PRESSURE 300 PSIG. SHUT IN PRESSURE 250 PSIG.

Perfs:

INVOICED
DATE ~~9/23~~ 9/24/08
INV. NO. 2009060416

RECEIVED
KANSAS CORPORATION COMMISSION


SEP 12 2008

CONSERVATION DIVISION
WICHITA, KS

Remarks: USED 60/40 POZMIX 4% GEL BY COPELAND ACID.

Plugged through: TBG

District: 01

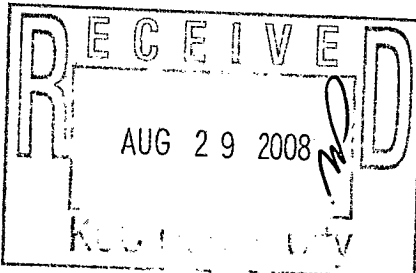

Signed

Richard W. Lacey

(TECHNICIAN)

Form GP-233

[Handwritten signature]