

15-065-20879-00-00


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Graham County, Sec. 21 Twp. 10 Rge. 22 E/W
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines
SW NW NE

Lease Owner F & M Oil Co., Inc.
Lease Name Griffith Well No. 1
Office Address 505 Union Center, Wichita, Kansas 67202
Character of Well (Completed as Oil, Gas or Dry Hole)

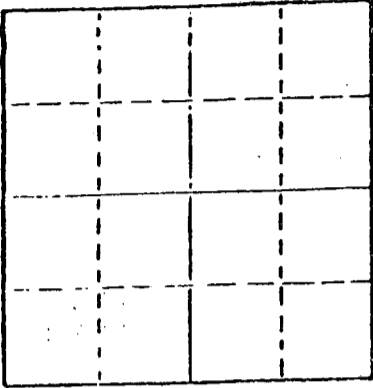

Locate well correctly on above
Section Plot

Dry Hole
Date Well completed November 14 19 76
Application for plugging filed November 14 19 76
Application for plugging approved November 14 19 76
Plugging commenced November 14 19 76
Plugging completed November 14 19 76
Reason for abandonment of well or producing formation
Dry Hole

If a producing well is abandoned, date of last production
19

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Gilbert Balthazor
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3825
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid
was placed and the method or methods used in introducing it into the hold. If cement or other
plugs were used, state the character of same and depth placed, from _____ feet to
_____ feet for each plug set.

Hole full of heavy mud to 850' w/70 sacks 50/50 Pozmix, 6% Gel thru drill pipe.
Mud to 250' w/20 sacks cement thru drill pipe.
Mud to 40' w/ $\frac{1}{2}$ sack hulls plug and 10 sacks cement.

RECEIVED
STATE CORPORATION COMMISSION

NOV 17 1976
11-17-1976
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Duke Drilling Co.

STATE OF KANSAS COUNTY OF BARTON, ss.
Larry Curtis (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of
the facts, statements, and matters herein contained and the log of the above-described well
as filed and that the same are true and correct. So help me God.

(Signature)

Larry Curtis
Box 823, Great Bend, Kansas 67530
(Address)

SUBSCRIBED AND SWORN TO before me this 15th day of November, 1976

My commission expires April 11, 1978



Heidi M. Wagne
Notary Public.

DRILLERS' WELL LOG

DATE COMMENCED: November 8, 1976
 DATE COMPLETED: November 14, 1976

F & M Oil Co., Inc.
 "Griffith # 1"
 SW NW NE
 Sec 21-T10-R22W
 Graham County, Kansas

ELEVATION: 2333 K.B.

0 - 915' Clay and Shale
 915 - 1842' Sand and Shale
 1842 - 1888' Anhydrite
 1888 - 2557' Shale and Lime
 2557 - 2561' Shale
 2561 - 3595' Lime and Shale
 3595 - 3818' Lime
 3818 - 3825' Lime and Shale
 3825' RTD

FORMATION DATA

Anhydrite	1842
Heebner	2557
Toronto	3579
Kansas City	3595
Base K.C.	3818
RTD	3825

SURFACE PIPE: Set used 28#,
 8 5/8" pipe @ 252' w/165 sacks
 Common, 2% Gel, 3% cc.

A F F I D A V I T

STATE OF KANSAS }
 COUNTY OF BARTON } ss.

Larry Curtis, of lawful age, does swear and state that the facts and statements herein contained are true and correct to the best of his knowledge.

Larry Curtis

Subscribed and sworn to before me this 15th day of November, 1976.

Clarence M. Haque
 Notary Public

My Commission Expires: April 11, 1978



11-17-1976