

STATE OF KANSAS
STATE CORPORATION COMMISSION
200 Colorado Derby Building
Wichita, Kansas 67202

WELL PLUGGING RECORD
K.A.R.-82-3-117

#4

API NUMBER 15-179-20,953-00-00

LEASE NAME JONES

WELL NUMBER 1

1650 Ft. from S Section Line

4620 Ft. from E Section Line

SEC. 5 TWP. 10S RGE. 26 KEXXK(W)

COUNTY Sheridan

Date Well Completed 2/15/90

Plugging Commenced 5/2/91

Plugging Completed 5/2/91

TYPE OR PRINT
NOTICE: Fill out completely
and return to Cons. Div.
office within 30 days.

LEASE OPERATOR NATIONAL PETROLEUM RESERVES, INC.

ADDRESS 250 N. Rock Rd., Ste. 340 Wichita, KS. 67206

PHONE# (316) 681-3515 OPERATORS LICENSE NO. 9482

Character of Well oil

(Oil) Gas, D&A, SWD, Input, Water Supply Well

The plugging proposal was approved on 5/2/91 (date)

by Carl Goodrow (KCC District Agent's Name)

Is ACO-1 filed? Yes If not, is well log attached?

Producing Formation Lansing Depth to Top Bottom T.D. 4380'

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put in	Pulled out
				8 5/8"	267.15	none 175 SKS, NWP - RECORDED
				4 1/2"	4041.00	none 100 SKS 350 SKS, 2nd stage Circulated w/cement, NO CASING RECORD

Describe in detail, the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet each set.

tried on to 8" annulus & pumped 25 SKS cement to 400#; shut-in at 400#
tried on to 4 1/2" casing & pumped 250 SKS cement 150# bulls mixed in to maximum PSI 400# &
shut-in at 400#, plug down, 3:10 P.M. 5/2/91

(If additional description is necessary, use BACK of this form.)

Name of Plugging Contractor Halliburton Services License No. RECEIVED STATE CORPORATION COMMISSION

Address Oberlin, KS. MAY 03 1991

NAME OF PARTY RESPONSIBLE FOR PLUGGING FEES: NATIONAL PETROLEUM RESERVES, INC. CONSERVATION DIVISION

STATE OF KANSAS COUNTY OF SEDGWICK, ss. Wichita, Kansas

Ted c. Bredehoff (Employee of Operator) or (Operator) of above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed that the same are true and correct, so help me God.

(Signature) Ted C. Bredehoff

(Address) 250 N. Rock Rd. Ste 340 Wichita, KS. 67206

SUSAN E. BREDEHOFT
NOTARY PUBLIC
STATE OF KANSAS
My Appt. Exp. 5-13-93

AND SWORN TO before me this 2 day of May, 1991

Susan E. Bredehoff
Notary Public

My Commission Expires: 5-13-93

15-179-20953-00-00

ORIGINAL

CONFIDENTIAL

EMPHASIS OIL OPERATIONS

P. O. BOX 506

RUSSELL, KS 67665

RELEASED

FEB 28 1991

DRILLERS LOG

FROM CONFIDENTIAL

OPERATOR: National Petroleum Reserves, Inc.
250 N. Rock Rd., Suite 340
Wichita, Kansas 67206

CONTRACTOR: Emphasis Oil Operations
Box 506
Russell, KS 67665

LEASE: Jones

WELL #1

LOCATION: C S/2 NW SW
Section 5-10S-26W
Sheridan County, Kansas

LOGGERS TOTAL DEPTH: 4380'

ROTARY TOTAL DEPTH: 4380'

COMMENCED: 1/10/90

CASING: 8-5/8" @ 268' w/175 sks cement
4-1/2" @ 4138' w/100 sks cement

ELEVATION: 2632' K.B.

COMPLETED: 1/19/90

STATUS: Oil Well

DEPTHS & FORMATIONS

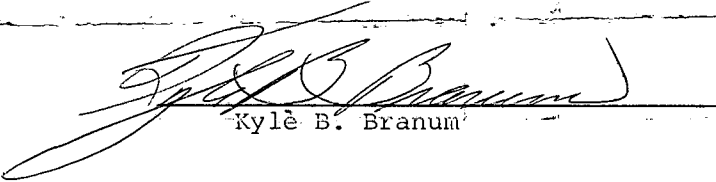
(All measurements from K.B.)

Top Soil & Sand	60'	Topeka	3618'
Dakota Sand	1321'	Heebner	3827'
Red Bed	1351'	Toronto	3849'
Cedar Hills	1860'	Lansing-Kansas City	3870'
Red Bed	2030'	Pawnee	4246'
Anhydrite	2243'	R.T.D.	4380'
Red Bed	2293'		

RECEIVED
STATE CORPORATION COMMISSION
FEB 23 1990
02-23-1990
CONSERVATION DIVISION
Wichita, Kansas

STATE OF KANSAS)
) ss
COUNTY OF RUSSELL)


Kyle B. Branum, of Emphasis Oil Operations, states that the above and foregoing is a true and correct log of the above captioned well, to the best of his knowledge.


Kyle B. Branum

Subscribed and sworn to before me on January 22, 1990.

My commission expires: February 6, 1992.

GLEND A. R. TIFFIN
NOTARY PUBLIC
STATE OF KANSAS
MY APPT. EXPIRES 2-6-92


Glenda R. Tiffin, Notary Public