


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 North Market, Insurance Bldg.
Wichita, Kansas

Graham County. Sec. 3 Twp. 10 Rge. (E) 25 (W)

Location as "NE/CNWSW" or footage from lines 150' NE of C NW NE 1/4
Lease Owner Herman Geo. Kaiser, Oil Producer
Lease Name Fox "A" Well No. 2
Office Address 909 Palace Building, Tulsa, Oklahoma
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed August 26, 19 60
Application for plugging filed August 26, 19 60
Application for plugging approved August 26, 19 60
Plugging commenced August 26, 19 60
Plugging completed August 26, 19 60
Reason for abandonment of well or producing formation Dry

NORTH

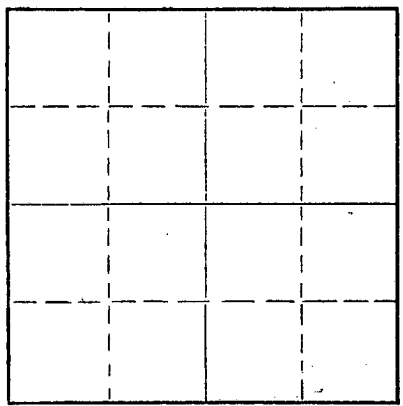

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well A. D. Fabricius
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4015 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	215	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

MUDDED HOLE WITH HEAVY ROTARY MUD TO 400 FT.,
SET PLUG AND CEMENTED WITH 20 SACKS CEMENT
THROUGH DRILL PIPE. MUDDED HOLE TO 200 FT., SET
PLUG AND CEMENTED WITH 20 SACKS CEMENT. MUDDED
HOLE TO 40 FT. SET PLUG AND CEMENTED WITH 10
SACKS CEMENT TO SURFACE.

RECEIVED
STATE CORPORATION COMMISSION
SEP 7 1960
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor H-30, Inc.
Address 709 Petroleum Bldg., Wichita, Kansas

STATE OF Kansas COUNTY OF Sedgwick
L. C. Sponenberg ^{ss} employee of contractor


well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God

(Signature) L. C. Sponenberg
(Address) _____

SUBSCRIBED AND SWORN TO before me this 6th day of September, 19 60

My commission expires February 13, 1964

Rose Furey
Rose Furey, Notary Public.



15-065-02077-00-00


KANSAS GEOLOGICAL SOCIETY
KANSAS WELL LOG BUREAU - KANSAS WELL SAMPLE BUREAU
KANSAS GEOLOGICAL SOCIETY BUILDING
508 EAST MURDOCK - WICHITA, KANSAS

COMPANY **Herman Geo. Kaiser, Oil Producer**
FARM **Fox A** NO. **2**

SEC. **3** T. **10** R. **25W**
LOC. **150' NE of C NW NE 1/4**

TOTAL DEPTH **4015'**
COMM. **8/17/60** COMP. **8/27/60**
SHOT OR TREATED
CONTRACTOR **H-30, Inc.**
ISSUED

COUNTY **Graham**
KANSAS



CASING
20 10
15 8 **215'**
12 6
13 5

ELEVATION **2516 K. B.**

PRODUCTION **D & A**

FIGURES INDICATE BOTTOM OF FORMATIONS

Sand	20'
Shale & Sand Strks.	125'
Shale	216'
Shale & Shells	1070'
Sand & Shale	1165'
Shale	1225'
Sand	1425'
Shale & Shells	1780'
Sand	1910'
Shale & Shells	2141'
Anhydrite	2190'
Shale & Lime Strks.	2380'
Shale & Lime	2640'
Shale with Lime Strks.	2800'
Lime & Shale	2835'
Lime with Shale Strks.	2945'
Shale & Lime	3842'
Kansas City Lime	3853'
Lime & Shale	3890'
Lime	3895'
Kansas City Lime	3905'
Lime & Shale	3948'
Kansas City Lime	3975'
Lime & Shale	3995'
Lansing Lime	4015'
Kansas City Lime - T. D.	4015'

RECEIVED
STATE CONSERVATION COMMISSION

SEP 7 1960

CONSERVATION DIVISION
Wichita, Kansas

Formation Tops:

Heebner	3761 -1245
Toronto	3785 -1269
Lansing	3800 -1284


I hereby certify that this is a true and correct log of the above described well as shown by the drilling reports.

H-30, INC.

By L. C. Spönenberg
L. C. Spönenberg

STATE OF KANSAS)
) SS.
COUNTY OF SEDGWICK)

Subscribed and sworn to before me, a Notary Public, in and for said County and State this 6th day of September, 1960.



Rose Furey
Rose Furey, Notary Public

My Commission expires February 13, 1964.