

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-119-20015-00-00
Spot: S2S2NE Sec/Twnshp/Rge: 4-35S-27W
2415 feet from N Section Line, 1320 feet from E Section Line
Lease Name: JOHANNSEN Well #: 1
County: MEADE Total Vertical Depth: 6302 feet

Operator License No.: 3273
Op Name: LOEB, HERMAN L.
Address: PO BOX 524
LAWRENCEVILLE, IL 62439

String	Size	Depth (ft)	Pulled (ft)	Comments
CIBP		6090		WITH 2 SX CMT
PROD	4.5	6294	3400	WITH 100 SX CMT <u>204.82</u>
SURF	8.625	1310		WITH 650 SX CMT

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 10/17/2008 11:00 AM
Plug Co. License No.: 7407 Plug Co. Name: EAGLE WELL SERVICE DBA BRONCO ENERGY SERVICES
Proposal Rcvd. from: LLOYD GATES Company: HERMAN L. LOEB Phone: (405) 834-7782

Proposed Plugging Method: CIBP @ 6090' WITH 2 SX CMT. CIBP @ 1400'. PRESSURE TEST 4 1/2". PERFORATE @ 1350'. PUMP DOWN 4 1/2" WITH CMT. CIRCULATE TO 0' UP 8 5/8" X 4 1/2" ANNULUS.

Plugging Proposal Received By: RICHARD LACEY WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 10/17/2008 12:30 PM KCC Agent: JERRY W. STAPLETON

Actual Plugging Report:

CIBP @ 6090' WITH 2 SX CMT. 1ST PLUG AT 1350' WITH 15 SX GEL & 50 SX CMT. 2ND PLUG AT 491' WITH 50 SX CMT. 3RD PLUG AT 30' WITH 15 SX CMT. CMT TO SURFACE.

Perfs:

Top	Bot	Thru	Comments
6135	6157		


INVOICED
DATE 11-6-08
INV. NO. 2009060688

RECEIVED
KANSAS CORPORATION COMMISSION
OCT 29 2008
CONSERVATION DIVISION
WICHITA, KS

Remarks: USED 60/40 POZMIX 4% GEL BY BASIC ENERGY.

Plugged through: TBG

District: 01

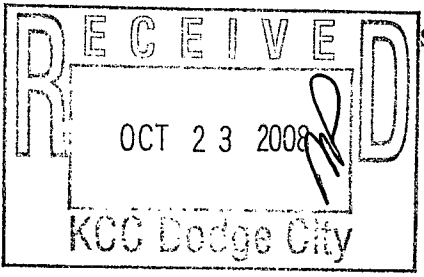

Signed _____

Jerry W. Stapleton
(TECHNICIAN)
PIRT

Form 0278
PKT