

CONFIDENTIAL

KANSAS CORPORATION COMMISSION  
OIL & GAS CONSERVATION DIVISION

ORIGINAL

Form ACO-1  
September 1999  
Form Must Be Typed

WELL COMPLETION FORM  
WELL HISTORY - DESCRIPTION OF WELL & LEASE

Operator: License # 33476  
Name: FIML Natural Resources, LLC  
Address: 410 17th St. Suite 900  
City/State/Zip: Denver, CO 80202  
Purchaser: NCRA  
Operator Contact Person: Phyllis Sobotik  
Phone: (303) 899-5608  
Contractor: Name: Excell Services, Inc.  
License: 8273

Wellsite Geologist: \_\_\_\_\_  
Designate Type of Completion:  
 New Well     Re-Entry     Workover  
 Oil     SWD     SIOW     Temp. Abd.  
 Gas     ENHR     SIGW  
 Dry     Other (Core, WSW, Expl., Cathodic, etc)

If Workover/Re-entry: Old Well Info as follows:  
Operator: NA

Well Name: \_\_\_\_\_  
Original Comp. Date: \_\_\_\_\_ Original Total Depth: \_\_\_\_\_  
 Deepening     Re-perf.     Conv. to Enhr./SWD  
 Plug Back     Plug Back Total Depth  
 Commingled    Docket No. \_\_\_\_\_  
 Dual Completion    Docket No. \_\_\_\_\_  
 Other (SWD or Enhr.?)    Docket No. \_\_\_\_\_

<u>6/09/06</u>	<u>6/21/06</u>	<u>7/14/06</u>
Spud Date or Recompletion Date	Date Reached TD	Completion Date or Recompletion Date

API No. 15 - 171-20626-0000  
County: Scott  
C SW NW Sec. 29 Twp. 18 S. R. 31  East  West  
3300 feet from Q / N (circle one) Line of Section  
660 feet from E / Q (circle one) Line of Section

Footages Calculated from Nearest Outside Section Corner:  
(circle one) NE SE NW SW  
Lease Name: Morrison Well #: 5-29-1831  
Field Name: To be determined  
Producing Formation: Mississippian Spergen  
Elevation: Ground: 2970' Kelly Bushing: 2982'  
Total Depth: 4758' Plug Back Total Depth: 4686'  
Amount of Surface Pipe Set and Cemented at 8 jts 8 5/8" @ 358 Feet  
Multiple Stage Cementing Collar Used?  Yes  No  
If yes, show depth set 2968' Feet  
If Alternate II completion, cement circulated from 2968' (DV Tool)  
feet depth to Surface w/ 505 sx cmt.


Drilling Fluid Management Plan *ALT II WITH 8-27-07*  
(Data must be collected from the Reserve Pit)  
Chloride content 1500 ppm Fluid volume 900 bbls  
Dewatering method used Evaporation and backfill  
Location of fluid disposal if hauled offsite: \_\_\_\_\_  
Operator Name: \_\_\_\_\_  
Lease Name: \_\_\_\_\_ License No.: \_\_\_\_\_  
Quarter \_\_\_\_\_ Sec. \_\_\_\_\_ Twp. \_\_\_\_\_ S. R. \_\_\_\_\_  East  West  
County: \_\_\_\_\_ Docket No.: \_\_\_\_\_

**INSTRUCTIONS:** An original and two copies of this form shall be filed with the Kansas Corporation Commission, 130 S. Market - Room 2078, Wichita, Kansas 67202, within 120 days of the spud date, recompletion, workover or conversion of a well. Rule 82-3-130, 82-3-106 and 82-3-107 apply. Information of side two of this form will be held confidential for a period of 12 months if requested in writing and submitted with the form (see rule 82-3-107 for confidentiality in excess of 12 months). One copy of all wireline logs and geologist well report shall be attached with this form. ALL CEMENTING TICKETS MUST BE ATTACHED. Submit CP-4 form with all plugged wells. Submit CP-111 form with all temporarily abandoned wells.

All requirements of the statutes, rules and regulations promulgated to regulate the oil and gas industry have been fully complied with and the statements herein are complete and correct to the best of my knowledge.

Signature: Phyllis Sobotik  
Title: Operations Regulatory Manager Date: Aug 30 2006

Subscribed and sworn to before me this 30<sup>th</sup> day of August  
2006  
Notary Public: Elaine Winick  
Date Commission Expires: 5/5/2009



**KCC Office Use ONLY**

Letter of Confidentiality Attached  
If Denied, Yes  Date: \_\_\_\_\_  
 Wireline Log Received  
 Geologist Report Received **RECEIVED**  
 UIC Distribution

**SEP 01 2006**

**KCC WICHITA**

Operator Name: FIML Natural Resources, LLC Lease Name: Morrison Well #: 5-29-1831

Sec. 29 Twp. 18 S. R. 31  East  West County: Scott

**INSTRUCTIONS:** Show important tops and base of formations penetrated. Detail all cores. Report all final copies of drill stems tests giving interval tested, time tool open and closed, flowing and shut-in pressures, whether shut-in pressure reached static level, hydrostatic pressures, bottom hole temperature, fluid recovery, and flow rates if gas to surface test, along with final chart(s). Attach extra sheet if more space is needed. Attach copy of all Electric Wireline Logs surveyed. Attach final geological well site report.

Drill Stem Tests Taken <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No <i>(Attach Additional Sheets)</i>  Samples Sent to Geological Survey <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No  Cores Taken <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No Electric Log Run <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No <i>(Submit Copy)</i>  List All E. Logs Run:  HRI/GR/SP Den/Neutron/GR Microlog	<input checked="" type="checkbox"/> Log    Formation (Top), Depth and Datum <input type="checkbox"/> Sample  <table border="0" style="width:100%"> <tr> <td style="width:60%">Name</td> <td style="width:20%">Top</td> <td style="width:20%">Datum</td> </tr> <tr> <td>Topeka</td> <td>3610'</td> <td>-628'</td> </tr> <tr> <td>Toronto</td> <td>3894'</td> <td>-912'</td> </tr> <tr> <td>LKC</td> <td>3928'</td> <td>-946'</td> </tr> <tr> <td>Marmaton</td> <td>4332'</td> <td>-1350'</td> </tr> <tr> <td>Mississippian</td> <td>4544'</td> <td>-1562'</td> </tr> </table>	Name	Top	Datum	Topeka	3610'	-628'	Toronto	3894'	-912'	LKC	3928'	-946'	Marmaton	4332'	-1350'	Mississippian	4544'	-1562'
Name	Top	Datum																	
Topeka	3610'	-628'																	
Toronto	3894'	-912'																	
LKC	3928'	-946'																	
Marmaton	4332'	-1350'																	
Mississippian	4544'	-1562'																	

CASING RECORD <input checked="" type="checkbox"/> New <input type="checkbox"/> Used							
Report all strings set-conductor, surface, intermediate, production, etc.							
Purpose of String	Size Hole Drilled	Size Casing Set (In O.D.)	Weight Lbs. / Ft.	Setting Depth	Type of Cement	# Sacks Used	Type and Percent Additives
Surface	12-1/4"	8-5/8"	24#	358'	Class A	225	2% gel, 3% CaCl2
Production	7-7/8"	5-1/2"	15.5#	4736'	ASC	300	2% gel, 10% salt
				2968 (DV)	light	505	5pps Gilsonite, .5 Flocele

ADDITIONAL CEMENTING / SQUEEZE RECORD				
Purpose:	Depth Top Bottom	Type of Cement	#Sacks Used	Type and Percent Additives
<input type="checkbox"/> Perforate <input type="checkbox"/> Protect Casing <input type="checkbox"/> Plug Back TD <input type="checkbox"/> Plug Off Zone				

Shots Per Foot	PERFORATION RECORD - Bridge Plugs Set/Type Specify Footage of Each Interval Perforated	Acid, Fracture, Shot, Cement Squeeze Record (Amount and Kind of Material Used)	Depth
4	4591' - 4594'	A/ 250 gal 15% MCA, 1000 gals 15% INS	4591-94'

TUBING RECORD		Size	Set At	Packer At	Liner Run	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
		2-7/8"	4666'			
Date of First, Resumed Production, SWD or Enhr.			Producing Method			
8/11/2006			<input type="checkbox"/> Flowing <input checked="" type="checkbox"/> Pumping <input type="checkbox"/> Gas Lift <input type="checkbox"/> Other (Explain)			
Estimated Production Per 24 Hours	Oil Bbls.	Gas Mcf	Water Bbls.	Gas-Oil Ratio	Gravity	
	64	0	0			

Disposition of Gas    METHOD OF COMPLETION    Production Interval

Vented     Sold     Used on Lease     Open Hole     Perf.     Dually Comp.     Commingled    4591'-4594'  
*(If vented, Submit ACO-18.)*     Other (Specify) \_\_\_\_\_

Allied Cementing Co., Inc  
P.O. Box 31

Russell, KS 67665

RECEIVED  
JUN 29 2006  
2347

\*\*\*\*\*  
\* I N V O I C E \*  
\*\*\*\*\*

Invoice Number: 102879

Invoice Date: 06/25/06

Sold FIML Natural Resources  
To: L.L.C.  
410 17th St. #900  
Denver, CO  
80202

**KCC**  
AUG 30 2006  
**CONFIDENTIAL**

Cust I.D.....: FIML  
P.O. Number...: Morrison #5-29-1831  
P.O. Date.....: 06/25/06

Due Date.: 07/25/06  
Terms.....: Net 30

Item I.D./Desc.	Qty. Used	Unit	Price	Net	TX
Common	225.00	SKS	12.2000	2745.00	T
Gel	4.00	SKS	16.6500	66.60	T
Chloride	8.00	SKS	46.6000	372.80	T
Handling	237.00	SKS	1.9000	450.30	E
Mileage	60.00	MILE	18.9600	1137.60	E
237 sks @ >08 per sk per mi					
Surface	1.00	JOB	815.0000	815.00	E
Extra Footage	57.00	PER	0.6500	37.05	E
Mileage pmp trk	60.00	MILE	5.0000	300.00	E
Head Rental	1.00	PER	100.0000	100.00	E
Guide Shoe	1.00	EACH	235.0000	235.00	T
Centralziers	3.00	EACH	55.0000	165.00	T
Surface Plug	1.00	EACH	60.0000	60.00	T

All Prices Are Net, Payable 30 Days Following  
Date of Invoice. 1 1/2% Charged Thereafter.  
If Account CURRENT take Discount of \$ 648.43  
ONLY if paid within 30 days from Invoice Date

Subtotal: 6484.35  
Tax.....: 229.59  
Payments: 0.00  
Total....: 6713.94

(648.43)  
6065.51

8100-145  
Adam D. Bl...  
D06077

RECEIVED  
SEP 01 2006  
KCC WICHITA

# ALLIED CEMENTING CO., INC. 24470

Federal Tax I.D. #

KCC

REMIT TO P.O. BOX 31  
RUSSELL, KANSAS 67665

AUG 30 2006

SERVICE POINT:

DAKLEY

DATE <u>6-9-06</u>	SEC <u>29</u>	TWP <u>183</u>	RANGE <u>31W</u>	ON LOCATION <u>5:00</u>	JOB START <u>9:30 AM</u>	JOB FINISH <u>10:00 PM</u>
LEASE <u>MORRISON</u>	WELL # <u>5</u>	LOCATION <u>SCOTT CITY 8E-1/2S-W70</u>	COUNTY <u>SCOTT</u>	STATE <u>Ks</u>		
OLD OR <u>NEW</u> (Circle one)						

CONFIDENTIAL

CONTRACTOR EXCELL DRILL RIGS OWNER SAME

TYPE OF JOB SURFACE

HOLE SIZE 12 1/4" T.D. 362'

CASING SIZE 8 5/8" DEPTH 357'

TUBING SIZE \_\_\_\_\_ DEPTH \_\_\_\_\_

DRILL PIPE \_\_\_\_\_ DEPTH \_\_\_\_\_

TOOL \_\_\_\_\_ DEPTH \_\_\_\_\_

PRES. MAX \_\_\_\_\_ MINIMUM \_\_\_\_\_

MEAS. LINE \_\_\_\_\_ SHOE JOINT \_\_\_\_\_

CEMENT LEFT IN CSG. 15'

PERFS. \_\_\_\_\_

DISPLACEMENT 21 3/4 BBL

CEMENT

AMOUNT ORDERED 225 SKs com 39 cc 290 6EL

COMMON	<u>225 SKs</u>	@	<u>12<sup>20</sup>/<sub>100</sub></u>	<u>2745<sup>00</sup></u>
POZMIX		@		
GEL	<u>4 SKs</u>	@	<u>16<sup>65</sup>/<sub>100</sub></u>	<u>66<sup>60</sup></u>
CHLORIDE	<u>8 SKs</u>	@	<u>46<sup>60</sup>/<sub>100</sub></u>	<u>372<sup>80</sup></u>
ASC		@		

EQUIPMENT

PUMP TRUCK CEMENTER TERRY

# 191 HELPER WAYNE

BULK TRUCK DRIVER KELLY

# \_\_\_\_\_ DRIVER \_\_\_\_\_

RECEIVED

SEP 01 2006

KCC WICHITA

HANDLING 237 SKs @ 1<sup>90</sup>/<sub>100</sub> 450<sup>30</sup>

MILEAGE 84 PER SR/MI 1137<sup>60</sup>

TOTAL 4772<sup>30</sup>

REMARKS:

CEMENT DID CIRC.

THANK YOU

CHARGE TO: FIML

STREET \_\_\_\_\_

CITY \_\_\_\_\_ STATE \_\_\_\_\_ ZIP \_\_\_\_\_

SERVICE

DEPTH OF JOB 357'

PUMP TRUCK CHARGE 815<sup>00</sup>

EXTRA FOOTAGE 57' @ 1.65 37<sup>05</sup>

MILEAGE 60 MI @ 5<sup>00</sup>/<sub>100</sub> 300<sup>00</sup>

MANIFOLD \_\_\_\_\_ @ \_\_\_\_\_

HEAD RENTAL @ 100<sup>00</sup>

TOTAL 1252<sup>05</sup>

8 5/8" PLUG & FLOAT EQUIPMENT

1-64 hole SHOE 235<sup>00</sup>

3- CENTRALIZERS @ 55<sup>00</sup>/<sub>100</sub> 165<sup>00</sup>

1- SURFACE PLUG @ 60<sup>00</sup>/<sub>100</sub> 60<sup>00</sup>

TOTAL 460<sup>00</sup>

To Allied Cementing Co., Inc.  
You are hereby requested to rent cementing equipment and furnish cementer and helper to assist owner or contractor to do work as is listed. The above work was done to satisfaction and supervision of owner agent or contractor. I have read & understand the "TERMS AND CONDITIONS" listed on the reverse side.

TAX \_\_\_\_\_

TOTAL CHARGE \_\_\_\_\_

DISCOUNT \_\_\_\_\_ IF PAID IN 30 DAYS

SIGNATURE W Gary Duke

W Gary Duke  
PRINTED NAME

Allied Cementing Co., Inc  
P.O. Box 31

Russell, KS 67665

RECEIVED  
JUN 29 2006

\*\*\*\*\*  
\* INVOICE \*  
\*\*\*\*\*

Invoice Number 102880

Invoice Date 06/25/06

KCC

AUG 30 2006

CONFIDENTIAL

2347

Sold FIML Natural Resources  
To: L.L.C.  
410 17th St. #900  
Denver, CO  
80202

Cust I.D.....: FIML  
P.O. Number...: Morrison #5-29-1831  
P.O. Date.....: 06/25/06

Due Date.: 07/25/06  
Terms.....: Net 30

Item I.D./Desc.	Qty. Used	Unit	Price	Net	TX
Gel	6.00	SKS	16.6500	99.90	T
ASC	300.00	SKS	14.2000	4260.00	T
Salt	16.00	SKS	19.2000	307.20	T
WFR-2	500.00	GAL	1.0000	500.00	T
Handling	339.00	SKS	1.9000	644.10	E
Mileage	60.00	MILE	27.1200	1627.20	E
339 sks @.08 per sk per mi					
Bottom Stage	1.00	JOB	1750.0000	1750.00	E
Mileage pmp trk	60.00	MILE	5.0000	300.00	E
Head Rental	1.00	PER	100.0000	100.00	E
Guide Shoe	1.00	EACH	160.0000	160.00	T
Float Collar	1.00	EACH	265.0000	265.00	T
Centralizers	20.00	ACH	50.0000	1000.00	T
Basket	1.00	EACH	150.0000	150.00	T
Limit Clamp	1.00	EACH	20.0000	20.00	T
DV Tool	1.00	EACH	3500.0000	3500.00	T

All Prices Are Net, Payable 30 Days Following  
Date of Invoice. 1 1/2% Charged Thereafter.  
If Account CURRENT take Discount of \$ 1468.34  
ONLY if paid within 30 days from Invoice Date

Subtotal: 14683.40  
Tax.....: 646.51  
Payments: 0.00  
Total....: 15329.91

[1468.34]

13861.57

D06077

8200-118  
Adam De Bl...

1st Stage

RECEIVED

SEP 01 2006

KCC WICHITA

# ALLIED CEMENTING CO., INC. 24659

Federal Tax I.D. No.

AUG 30 2006

REMIT TO P.O. BOX 31  
RUSSELL, KANSAS 67665

SERVICE POINT:

**CONFIDENTIAL**

Oakley

DATE <u>6-20-06</u>	SEC. <u>29</u>	TWP. <u>18s</u>	RANGE <u>31w</u>	CALLED OUT	ON LOCATION <u>3:45 PM</u>	JOB START <u>7:15 PM</u>	JOB FINISH <u>8:00 PM</u>
LEASE <u>Morrison</u>	WELL # <u>5</u>	LOCATION <u>SCOTT CITY 8E 12S W4S</u>			COUNTY <u>SCOTT</u>	STATE <u>KS</u>	
OLD OR <u>NEW</u> (Circle one)							

CONTRACTOR Excell Drilling Rig 3  
 TYPE OF JOB Two Stage (Bottom Stage)  
 HOLE SIZE 7 7/8 T.D. 4734.02'  
 CASING SIZE 5 1/2 DEPTH 4734.02'  
 TUBING SIZE \_\_\_\_\_ DEPTH \_\_\_\_\_  
 DRILL PIPE \_\_\_\_\_ DEPTH \_\_\_\_\_  
 TOOL DV Tool DEPTH 2966'  
 PRES. MAX \_\_\_\_\_ MINIMUM \_\_\_\_\_  
 MEAS. LINE \_\_\_\_\_ SHOE JOINT 41.07  
 CEMENT LEFT IN CSG. 41.07  
 PERFS. \_\_\_\_\_  
 DISPLACEMENT 40 Bbls Water + 71 3/4 Bbls Mud  
 EQUIPMENT Total 111 3/4 Bbls

OWNER same  
 CEMENT AMOUNT ORDERED  
300 SKS ASC, 2% Gel, 10% Salt  
 COMMON \_\_\_\_\_ @ \_\_\_\_\_  
 POZMIX \_\_\_\_\_ @ \_\_\_\_\_  
 GEL 6 SKS @ 16.65 99.90  
 CHLORIDE \_\_\_\_\_ @ \_\_\_\_\_  
 ASC 300 SKS @ 14.20 4260.00  
 \_\_\_\_\_ @ \_\_\_\_\_  
SALT 16 SKS cut @ 19.20 307.20  
 \_\_\_\_\_ @ \_\_\_\_\_  
WFR-2 500 gals @ 1.00 500.00  
 \_\_\_\_\_ @ \_\_\_\_\_  
 \_\_\_\_\_ @ \_\_\_\_\_  
 \_\_\_\_\_ @ \_\_\_\_\_  
 HANDLING 339 SKS @ 1.90 644.10  
 MILEAGE 84 SK/mile 1627.20  
 TOTAL 7438.40

PUMP TRUCK CEMENTER Dean  
 # 373-281 HELPER Andrew/Max  
 BULK TRUCK  
 # 399 DRIVER Rex  
 BULK TRUCK  
 # \_\_\_\_\_ DRIVER \_\_\_\_\_

**REMARKS:**

Mix 500 gals WFR-2 + 300 SKS ASC  
2% Gel, 10% Salt, wash pump & line.  
Disp 40 Bbls Water + 71 3/4 Bbls Mud.  
Plug did not land, float held, drop  
Tool open DV Tool at 900', circulate  
Hole for 4 hrs.

Thank you

CHARGE TO: FIML  
 STREET \_\_\_\_\_  
 CITY \_\_\_\_\_ STATE \_\_\_\_\_ ZIP \_\_\_\_\_


**RECEIVED**

SEP 01 2006

**KCC WICHITA**

To Allied Cementing Co., Inc.  
 You are hereby requested to rent cementing equipment and furnish cementer and helper to assist owner or contractor to do work as is listed. The above work was done to satisfaction and supervision of owner agent or contractor. I have read & understand the "TERMS AND CONDITIONS" listed on the reverse side.

SIGNATURE

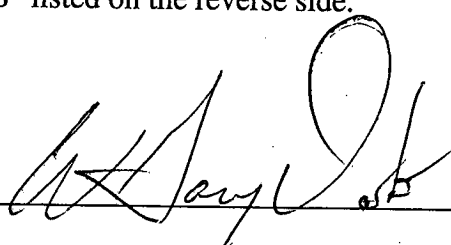

PRINTED NAME

**SERVICE**

DEPTH OF JOB \_\_\_\_\_  
 PUMP TRUCK CHARGE \_\_\_\_\_ 1750.00  
 EXTRA FOOTAGE \_\_\_\_\_ @ \_\_\_\_\_  
 MILEAGE 60 miles @ 5.00 300.00  
 MANIFOLD \_\_\_\_\_ @ \_\_\_\_\_  
Head Rental @ \_\_\_\_\_ 100.00  
 \_\_\_\_\_ @ \_\_\_\_\_  
 TOTAL 2450.00

5 1/2 **PLUG & FLOAT EQUIPMENT**

Guide shoe 160.00  
APU Float Collar @ 265.00  
20-Centralizers @ 50.00 1000.00  
1-Basket @ 150.00  
1-Limit clamp @ 20.00  
1-DV Tool @ 3500.00  
 TOTAL 5095.00

TAX \_\_\_\_\_  
 TOTAL CHARGE \_\_\_\_\_  
 DISCOUNT \_\_\_\_\_ IF PAID IN 30 DAYS

Allied Cementing Co., Inc  
P.O. Box 31

Russell, KS 67665

RECEIVED  
JUN 29 2006  
2347

\*\*\*\*\*  
\* INVOICE \*  
\*\*\*\*\*

Invoice Number: 102881

Invoice Date: 06/25/06

KCC

AUG 30 2006

CONFIDENTIAL

Sold FIML Natural Resources  
To: L.L.C.  
410 17th St. #900  
Denver, CO  
80202

Cust I.D.....: FIML  
P.O. Number...: Morrison #5-29-1831  
P.O. Date.....: 06/25/06

Due Date.: 07/25/06  
Terms.....: Net 30

Item I.D./Desc.	Qty. Used	Unit	Price	Net	TX
Lite	525.00	SKS	10.7500	5643.75	T
Gilsonite	2625.00	LBS	0.7000	1837.50	T
FloSeal	268.00	LBS	2.0000	536.00	T
Handling	614.00	SKS	1.9000	1166.60	E
Mileage	60.00	MILE	49.1200	2947.20	E
614 sks @>08 per sk per mi					
Top Stage	1.00	JOB	955.0000	955.00	E

All Prices Are Net, Payable 30 Days Following Date of Invoice. 1 1/2% Charged Thereafter.  
If Account CURRENT take Discount of \$ 1308.60  
ONLY if paid within 30 days from Invoice Date

Subtotal: 13086.05  
Tax.....: 505.08  
Payments: 0.00  
Total....: 13591.13

(1308.60)  
12,282.53

8200-118  
Adam D. Blum #06077  
2nd stage

RECEIVED  
SEP 01 2006  
KCC WICHITA

# ALLIED CEMENTING CO., INC. 24660

Federal Tax I.D.#

**KCC**

REMIT TO P.O. BOX 31  
RUSSELL, KANSAS 67665

SERVICE POINT:

Oakley

AUG 30 2006

DATE <u>6-20-06</u>	SEC. <u>29</u>	TWP. <u>183</u>	RANGE <u>31W</u>	CALLED OUT <b>CONFIDENTIAL</b>	ON LOCATION <u>3:45 PM</u>	JOB START <u>12:20 AM</u>	JOB FINISH <u>1:15 AM</u>
LEASE <u>Morrison</u>		WELL # <u>5</u>		LOCATION <u>SCOTT CITY 8E 1/2 S W4</u>		COUNTY <u>SCOTT</u>	STATE <u>Ks</u>
OLD OR <input checked="" type="radio"/> NEW (Circle one)							

CONTRACTOR Excell Drlg Rig 3  
 TYPE OF JOB Two stage (top stage)  
 HOLE SIZE 7 7/8 T.D. 4734'  
 CASING SIZE 5 1/2 DEPTH \_\_\_\_\_  
 TUBING SIZE \_\_\_\_\_ DEPTH \_\_\_\_\_  
 DRILL PIPE \_\_\_\_\_ DEPTH \_\_\_\_\_  
 TOOL DV-7001 DEPTH 2966'  
 PRES. MAX \_\_\_\_\_ MINIMUM \_\_\_\_\_  
 MEAS. LINE \_\_\_\_\_ SHOE JOINT \_\_\_\_\_  
 CEMENT LEFT IN CSG. \_\_\_\_\_  
 PERFS. \_\_\_\_\_  
 DISPLACEMENT 70.59 Bbls

OWNER Same  
 CEMENT  
 AMOUNT ORDERED  
525 sks Lite 5# Gilsomite 1/2# Flo Seal

EQUIPMENT

PUMP TRUCK CEMENTER Dean  
 # 373-281 HELPER Andrew  
 BULK TRUCK  
 # 394 DRIVER Rex Mike  
 BULK TRUCK  
 # 218 DRIVER Rex

COMMON	@		
POZMIX	@		
GEL	@		
CHLORIDE	@		
ASC	@		
<u>Lite 525 sks</u>	@	<u>10.75</u>	<u>5649.75</u>
<u>Gilsomite 26259</u>	@	<u>.70</u>	<u>1837.50</u>
<u>Flo Seal 2689</u>	@	<u>2.00</u>	<u>536.00</u>
HANDLING <u>614 sks</u>	@	<u>1.90</u>	<u>1166.60</u>
MILEAGE <u>84 sk/mile</u>			<u>2947.20</u>
			TOTAL <u>12131.05</u>

REMARKS:

Plug Rate Hole w/155kcs  
Plug mouse hole w/10skcs  
Mix 500 sks Lite, 5# Gilsomite,  
1/4# Flo Seal down 5 1/2 csg, wash  
pump & Line. Disp Plug To DV  
Tool Close Tool w/1800#. Cement did circulate

*Thank you*

CHARGE TO: F/ML  
 STREET \_\_\_\_\_  
 CITY \_\_\_\_\_ STATE \_\_\_\_\_ ZIP \_\_\_\_\_

SERVICE

DEPTH OF JOB	<u>2966'</u>		
PUMP TRUCK CHARGE			<u>955.00</u>
EXTRA FOOTAGE	@		
MILEAGE <u>60 miles</u>	@		<u>N/A</u>
MANIFOLD	@		
	@		
	@		
			TOTAL <u>955.00</u>

**RECEIVED**

SEP 01 2006

**KCC WICHITA**

PLUG & FLOAT EQUIPMENT

_____	@		
_____	@		
_____	@		
_____	@		
_____	@		
			TOTAL _____

To Allied Cementing Co., Inc.  
 You are hereby requested to rent cementing equipment and furnish cementer and helper to assist owner or contractor to do work as is listed. The above work was done to satisfaction and supervision of owner agent or contractor. I have read & understand the "TERMS AND CONDITIONS" listed on the reverse side.

TAX \_\_\_\_\_  
 TOTAL CHARGE \_\_\_\_\_  
 DISCOUNT \_\_\_\_\_ IF PAID IN 30 DAYS

SIGNATURE *[Signature]*

PRINTED NAME