

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-075-00122-00-00
Spot: SE Sec/Twnshp/Rge: 35-25S-39W
1315 feet from S Section Line, 1315 feet from E Section Line
Lease Name: MOYLE Well #: 1-35
County: HAMILTON Total Vertical Depth: 2601 feet

Operator License No.: 32864
Op Name: XTO ENERGY INC.
Address: 210 PARK AVE STE 2350
OKLAHOMA CITY, OK 73102

String	Size	Depth (ft)	Pulled (ft)	Comments
CIBP		2400		WITH 2 SX CMT
PROD	5.5	2581	0	WITH 150 SX CMT 84.53
SURF	8.625	333		WITH 225 SX CMT

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 08/06/2008 11:00 AM
Plug Co. License No.: 31529 Plug Co. Name: MIKE'S TESTING & SALVAGE, INC.
Proposal Rcvd. from: CURTIS KELSO Company: MIKE'S TESTING & SALVAGE, INC. Phone: (620) 938-2537

Proposed Plugging Method: CIBP @ 2400' & 2 SX CMT. TEST CASING. PERFORATE AT 650'. CIRCULATE CMT TO SURFACE.

Plugging Proposal Received By: STEVE DURRANT WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 08/13/2008 4:00 PM KCC Agent: KEN JEHLIK

Actual Plugging Report:
CIBP @ 2400' WITH 2 SX CMT. TEST CASING TO 500# & HELD. PERFORATE AT 650'. RATE OF 1.2 BPM @ 850#. PUMP 85 SX CMT, 150# HULLS. THEN 65 SX CMT AT 2 BPM @ 500#. SHUT IN PRESSURE AT 500#. PUMPED 60 SX CMT DOWN ANNULUS AND PRESSURED TO 400#. HOLDING.

Perfs:

Top	Bot	Thru	Comments
2514	2520		
2493	2499		
2466	2486		

INVOICED
DATE 9/24/08
INV. NO. 2009060469

RECEIVED
KANSAS CORPORATION COMMISSION


Remarks: USED 60/40 POZMIX 4% GEL BY COPELAND.

SEP 05 2008

Plugged through: CSG

CONSERVATION DIVISION
WICHITA, KS

District: 01

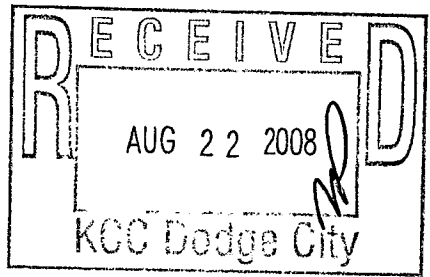

Signed Ken Jehlik (TECHNICIAN)