

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-135-24813-00-00
Spot: SWNENENW Sec/Twnshp/Rge: 11-19S-22W
335 feet from N Section Line, 2295 feet from W Section Line
Lease Name: KLEWENO Well #: 1-11
County: NESS Total Vertical Depth: 4299 feet

Operator License No.: 4058
Op Name: AMERICAN WARRIOR, INC.
Address: PO BOX 399
GARDEN CITY, KS 67846

String	Size	Depth (ft)	Pulled (ft)	Comments
SURF	8.625	228		WITH 160 SX CMT

139.72

Well Type: DH UIC Docket No: _____ Date/Time to Plug: 08/28/2008 5:30 PM
Plug Co. License No.: 33323 Plug Co. Name: PETROMARK DRILLING, LLC
Proposal Rcvd. from: KENNY ROACH Company: PETROMARK DRILLING, LLC Phone: (316) 734-8977

Proposed Plugging Method: 1ST PLUG AT 1500' WITH 50 SX CMT. 2ND PLUG AT 700' WITH 50 SX CMT. 3RD PLUG AT 400' WITH 40 SX CMT. 4TH PLUG AT 240' WITH 50 SX CMT. 5TH PLUG AT 60' WITH 20 SX CMT. 6TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. NO MOUSE HOLE

Plugging Proposal Received By: MICHAEL MAIER WitnessType: NONE
Date/Time Plugging Completed: 08/28/2008 7:30 PM KCC Agent: MICHAEL MAIER

Actual Plugging Report:

1ST PLUG AT 1500' WITH 50 SX CMT. 2ND PLUG AT 700' WITH 50 SX CMT. 3RD PLUG AT 400' WITH 40 SX CMT. 4TH PLUG AT 240' WITH 50 SX CMT. 5TH PLUG AT 60' WITH 20 SX CMT. 6TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. NO MOUSE HOLE

Perfs:


INVOICED
DATE 10-17-08
INV. NO. 2009060521

RECEIVED
KANSAS CORPORATION COMMISSION
SEP 22 2008
CONSERVATION DIVISION
WICHITA, KS

Remarks: USED 60/40 POZMIX 4% GEL 1/4# FLO SEAL BY ALLIED.

Plugged through: DP

District: 01

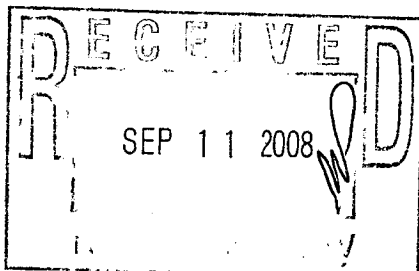

Signed Michael Maier
(TECHNICIAN)

[Handwritten initials]