

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-047-21578-00-00  
Spot: SWNE Sec/Twnshp/Rge: 16-26S-17W  
1980 feet from N Section Line, 1980 feet from E Section Line  
Lease Name: FISHER "C" Well #: 1-16  
County: EDWARDS Total Vertical Depth: 4592 feet

Operator License No.: 5003  
Op Name: MCCOY PETROLEUM CORPORATION  
Address: 8080 E CENTRAL STE 300  
WICHITA, KS 67206

String	Size	Depth (ft)	Pulled (ft)	Comments
SURF	8.625	310		WITH 250 SX CMT

149.24

Well Type: DH UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 09/12/2008 6:00 PM  
Plug Co. License No.: 5142 Plug Co. Name: STERLING DRILLING COMPANY  
Proposal Rcvd. from: KEN MCGUIRE Company: STERLING DRILLING COMPANY Phone: (620) 388-0124

Proposed Plugging Method: 1ST PLUG AT 1170' WITH 50 SX CMT. 2ND PLUG AT 600' WITH 30 SX CMT. 3RD PLUG AT 330' WITH 50 SX CMT. 4TH PLUG AT 60' WITH 20 SX CMT. 5TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. 6TH PLUG TO CIRCULATE MOUSE HOLE WITH 10 SX CMT.

Plugging Proposal Received By: ERIC MACLAREN Witness Type: NONE  
Date/Time Plugging Completed: 09/17/2008 8:00 PM KCC Agent: ERIC MACLAREN

Actual Plugging Report:

1ST PLUG AT 1170' WITH 50 SX CMT. 2ND PLUG AT 600' WITH 30 SX CMT. 3RD PLUG AT 330' WITH 50 SX CMT. 4TH PLUG AT 60' WITH 20 SX CMT. 5TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. 6TH PLUG TO CIRCULATE MOUSE HOLE WITH 10 SX CMT.

Perfs:

INVOICED

DATE 10-17-08  
INV. NO. 2009060527

RECEIVED  
KANSAS CORPORATION COMMISSION


SEP 22 2008

CONSERVATION DIVISION  
WICHITA, KS

Remarks: USED 60/40 POZMIX 4% GEL BY BASIC ENERGY.

Plugged through: DP

District: 01

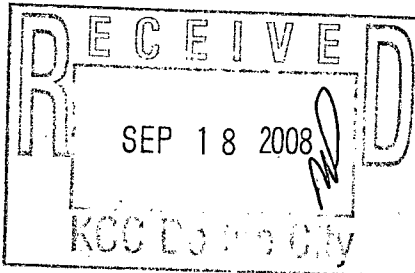

Signed Eric MacLaren  
(TECHNICIAN)

*[Handwritten signature]*  
PKT