

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-055-20117-00-00
Spot: NWNWSESE Sec/Twnshp/Rge: 4-24S-31W
1250 feet from S Section Line, 1250 feet from E Section Line
Lease Name: CRASE - A Well #: 1
County: FINNEY Total Vertical Depth: 2705 feet

Operator License No.: 5086
Op Name: PINTAIL PETROLEUM, LTD.
Address: 225 N MARKET STE 300
WICHITA, KS 67202

String	Size	Depth (ft)	Pulled (ft)	Comments
CIBP		1170		
PROD	4.5	2693	0	WITH 100 SX CMT
SURF	8.625	383		WITH 300 SX CMT

87.91

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 09/12/2008 1:00 PM
Plug Co. License No.: 31627 Plug Co. Name: WHITETAIL CRUDE, INC
Proposal Rcvd. from: MIKE FRITZLER Company: WHITETAIL CRUDE, INC Phone: (785) 798-3641

Proposed Plugging Method: PLUGGING PROPOSAL SAME AS ACTUAL PLUGGING.

Plugging Proposal Received By: STEVE DURRANT Witness Type: COMPLETE (100%)
Date/Time Plugging Completed: 09/13/2008 11:30 AM KCC Agent: STEVE DURRANT

Actual Plugging Report:

1ST PLUG TBG FISH @ 1530'. RIH & SPOT 20 SX COMMON CMT. WAIT ON CMT 1/2 HOUR. WELL ON SLIGHT VACUUM. 2ND PLUG SET CIBP @ 1170'. PERFORATE CASING @ 1150'. SET CMT RETAINER AT 1120' (PROBLEM WITH STINGER. SDON). 3RD PLUG PUMP 80 SX CMT OUT RETAINER. MAXIMUM PRESSURE 1000#. SHUT IN PRESSURE 1000#. 4TH PLUG PULL OUT OF RETAINER. CIRCULATE CMT TO SURFACE WITH 85 SX CMT. 5TH PLUG PUMP 150 SX CMT DOWN 8 5/8" X 4 1/2" ANNULUS. MAXIMUM PRESSURE 1000#. SHUT IN PRESSURE 1000#.

Perfs:

Top	Bot	Thru	Comments
2669	2682		

INVOICED
DATE 10-17-08
INV. NO. 2009060530


RECEIVED
KANSAS CORPORATION COMMISSION
SEP 22 2008

Remarks: USED 60/40 POZMIX 4% GEL BY ALLIED.

Plugged through: TBG

CONSERVATION DIVISION
WICHITA, KS

District: 01

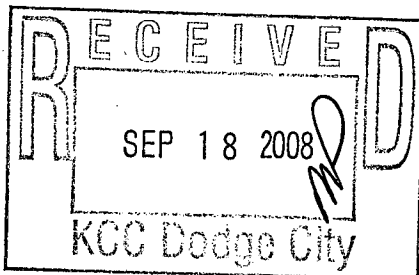

Signed

Steve Durrant

(TECHNICIAN)

PVT