

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-083-21456-00-00
Spot: SESE Sec/Twnshp/Rge: 7-23S-22W
680 feet from S Section Line, 720 feet from E Section Line
Lease Name: KORF Well #: 2
County: HODGEMAN Total Vertical Depth: 4516 feet

Operator License No.: 5086
Op Name: PINTAIL PETROLEUM, LTD.
Address: 225 N MARKET STE 300
WICHITA, KS 67202

| String | Size | Depth (ft) | Pulled (ft) | Comments |
|--------|-------|------------|-------------|-----------------|
| CIBP | | 4512 | | |
| PC | | 1442 | | |
| PROD | 5.5 | 4516 | 0 | WITH 140 SX CMT |
| SURF | 8.625 | 380 | | WITH 260 SX CMT |

146.77

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 09/15/2008 3:30 PM
Plug Co. License No.: 31627 Plug Co. Name: WHITETAIL CRUDE, INC
Proposal Rcvd. from: MIKE FRITZLER Company: WHITETAIL CRUDE, INC Phone: (785) 798-3641

Proposed Plugging Method: RUN TBG TO 4400' & PUMP 35 SX CMT & 200# HULLS. PULL TBG TO 1480'. CIRCULATE CMT TO SURFACE. PULL TBG & TOP OFF CASING. TIE ONTO BACKSIDE AND PRESSURE CASING WITH CMT.

Plugging Proposal Received By: STEVE DURRANT Witness Type: COMPLETE (100%)
Date/Time Plugging Completed: 09/15/2008 5:45 PM KCC Agent: MICHAEL MAIER

Actual Plugging Report:

RUN TBG TO 4278' & MIX 20 SX GEL IN 60 BBL WATER THEN PUMP 25 SX CMT & 200# HULLS. PULL TBG TO 1480' & PUMP 150 SX CMT. CMT CIRCULATED TO SURFACE. PULLED TBG & TOPPED OFF WITH 15 SX CMT. COULD NOT PUMP BACKSIDE. HEAD WAS FULL OF CMT. PULLED BOTH BULL PLUGS AND FOUND FULL OF CMT.

Perfs:

| Top | Bot | Thru | Comments |
|------|------|------|----------|
| 4505 | 4507 | | |
| 4492 | 4495 | | |
| 4484 | 4488 | | |

INVOICED
DATE 10-17-08
INV. NO. 2009060530

RECEIVED
KANSAS CORPORATION COMMISSION


SEP 22 2008

CONSERVATION DIVISION
WICHITA, KS

Remarks: USED 60/40 POZMIX 4% GEL BY SWIFT SERVICES.

Plugged through: TBG

District: 01

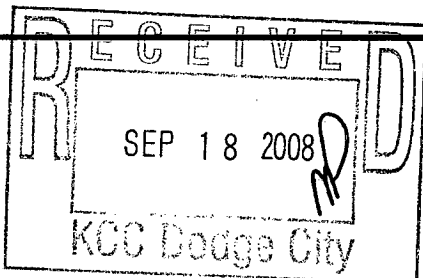

Signed Michael Maier (TECHNICIAN)