

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-097-20435-00-00
Spot: NWSE Sec/Twnshp/Rge: 23-27S-16W
1980 feet from S Section Line, 1980 feet from E Section Line
Lease Name: WARD Well #: 1-23
County: KIOWA Total Vertical Depth: 4630 feet

Operator License No.: 3959
Op Name: SIROKY OIL MANAGEMENT
Address: PO BOX 464
PRATT, KS 67124

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	4.5	4620	0	WITH 200 SX CMT
SURF	8.625	363		WITH 300 SX CMT 150.48

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 09/16/2008 11:00 AM
Plug Co. License No.: 33093 Plug Co. Name: GENESIS WELL SERVICE, INC.
Proposal Rcvd. from: EDGAR SANCHEZ Company: GENESIS WELL SERVICE, INC. Phone: (620) 770-0621

Proposed Plugging Method: SAND TO 4520' & 4 SX CMT. PLUG AT 1000' WITH 85 SX CMT. CHECK BACKSIDE.

Plugging Proposal Received By: STEVE DURRANT WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 09/16/2008 11:30 AM KCC Agent: JERRY W. STAPLETON

Actual Plugging Report:

OCTOBER 2002 SQUEEZE JOB 600' TO SURFACE SAND TO 4520' & 4 SX CMT.
1ST PLUG AT 1000' WITH 85 SX CMT TO SURFACE. PULL TBG & TOP OFF WITH 3
SX CMT. PUMP & PRESSURE BACKSIDE WITH 1 BBL CMT.

Perfs:

Top	Bot	Thru	Comments
4619	4630	OH	
4570	4590		


INVOICED
DATE 10-17-08
INV. NO. 2009060531

RECEIVED
KANSAS CORPORATION COMMISSION
SEP 22 2008
CONSERVATION DIVISION
WICHITA, KS

Remarks: USED 60/40 POZMIX 4% GEL BY BASIC ENERGY.

Plugged through: TBG

District: 01

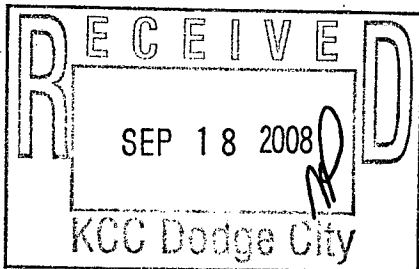

Signed

Jerry W Stapleton
(TECHNICIAN)
PIRCH

000
PKT