


WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bitting Building  
Wichita, Kansas

NORTH

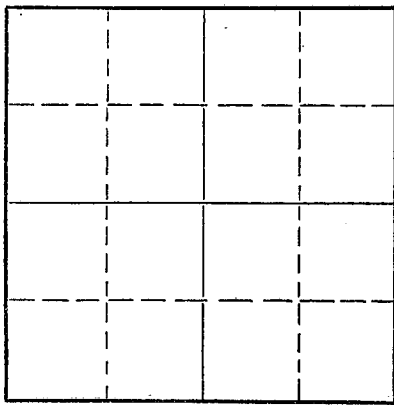

Locate well correctly on above  
Section Plat

Graham County. Sec. 34 Twp. 10 Rge. 22 (E) W (W)  
Location as "NE/CNWxSWx" or footage from lines SW NE NE  
Lease Owner WOOD RIVER OIL & REFINING CO., INC.  
Lease Name Webster Well No. B1  
Office Address 321 W. Douglas, Wichita, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Oil  
Date well completed June 7 1945  
Application for plugging filed October 20 1953  
Application for plugging approved October 21 1953  
Plugging commenced February 5 1954  
Plugging completed February 11 1954  
Reason for abandonment of well or producing formation Unprofitable

If a producing well is abandoned, date of last production October 1953  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty  
Producing formation Kansas City Depth to top 3590 Bottom 3663 Total Depth of Well 3999 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Kansas City	Oil & water	3590	3663	13"	282'	0
				8"	1817'	1193'
				5 1/2"	3978'	2652'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Filled hole with chat to 3970'. Dumped 4 sacks of cement at 3970'.  
Shot pipe off at 2652'. Pulled pipe and mudded hole to 280'. Set  
rock bridge and dumped 30 sacks of cement at 280'. Finished mudding  
hole to 25'. Set rock bridge and dumped 15 sacks of cement at base  
of cellar.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Wood River Oil & Refining Co., Inc.  
Address 321 West Douglas, Wichita 2, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.  
C. C. Chapin (employee of owner) or (~~owner~~) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) C C Chapin  
321 W. Douglas, Wichita, Kans. (Address)

SUBSCRIBED AND SWORN TO before me this 23rd day of February 1954

My Commission Expires Dec. 24, 1955

My commission expires \_\_\_\_\_ Notary Public.

24-7368-S 3-53-20M

