

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

1/8/07 Per OPS Fig's
PKA API Well Number: 15-185-22333-00
Spot: NWSWSENE Sec/Twnshp/Rge: 31-23S-13W
3148 feet from S Section Line, 1237 feet from E Section Line
Lease Name: CORNWELL Well #: 1-31
County: STAFFORD Total Vertical Depth: 4125 feet

Operator License No.: 5044
Op Name: WHITE PINE PETROLEUM CORPORATI
Address: 110 S. MAIN ST., SUITE 500
WICHITA, KS 67202

String	Size	Depth (ft)	Pulled (ft)	Comment
PROD	5.5	4124	1811	WITH 175 SX CMT
SURF	8.625	305		WITH 250 SX CMT

\$ 134.06

Well Type: OG UIC Docket No: _____ Date/Time to Plug: 12/08/2006 10:15 AM
Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.
Proposal Rcvd. from: MIKE BRADLEY Company: WHITE PINE PETROLEUM Phone: (316) 262-5429

Proposed Plugging Method: SAND TO 3670' & 5 SX CMT. PLUG AT 725' WITH 50 SX CMT. PLUG AT 325' WITH 50 SX CMT. PLUG AT 40' WITH 10 SX CMT.

Plugging Proposal Received By: JIM HOLLAND Witness Type: COMPLETE (100%)
Date/Time Plugging Completed: 12/08/2006 11:15 AM KCC Agent: STEVE PFEIFER

Actual Plugging Report:

SANDED BACK TO 3620' & PUT 5 SX CMT ON TOP OF SAND BRIDGE THROUGH DUMP BAILER. SPOT PLUGS THROUGH 5 1/2" CASING. 1ST PLUG AT 725' WITH 15 SX GEL & 50 SX CMT. 2ND PLUG AT 325' WITH 50 SX CMT. 3RD PLUG AT 40' WITH 10 SX CMT.


Perfs:

Top	Bot	Thru	Comments
3723	3739		KC
3716	3722		
3671	3677		

INVOICED
DATE 1-9-07
INV. NO. 200706117

Remarks: USED 6/40 POZMIX 6% GEL BY QUALITY OIL WELL CEMENTING.
Plugged through: CSG

District: 01

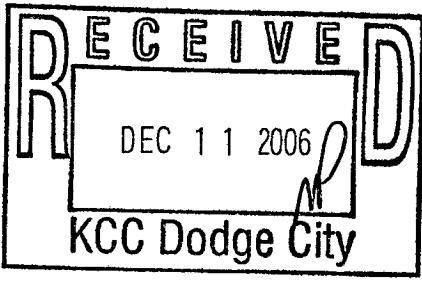

Signed Stephen J. Pfeifer
(TECHNICIAN)

RECEIVED
KANSAS CORPORATION COMMISSION
DEC 26 2006
CONSERVATION DIVISION
WICHITA, KS
Form CP-2/3