

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-151-21320-00-00
Spot: SESENWSW Sec/Twnshp/Rge: 15-29S-14W
1480 feet from S Section Line, 1120 feet from W Section Line
Lease Name: FIRST BAPTIST CHURCH Well #: 1-15
County: PRATT Total Vertical Depth: 4694 feet

Operator License No.: 31938
Op Name: INDIAN OIL CO., INC.
Address: PO BOX 209 2507 SE US 160 HWY
MEDICINE LODGE, KS 67104

String	Size	Depth (ft)	Pulled (ft)	Comments
CIBP		3960		WITH 2 SX CMT
PROD	4.5	4693	2784	WITH 200 SX CMT
SURF	8.625	409		WITH 300 SX CMT

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 09/24/2008 3:00 PM
Plug Co. License No.: 7407 Plug Co. Name: EAGLE WELL SERVICE DBA BRONCO ENERGY SERVICES
Proposal Rcvd. from: ANTHONY FARRAR Company: INDIAN OIL Phone: (620) 886-3763

Proposed Plugging Method: CIBP @ 3900' WITH 2 SX CMT. PLUG AT 800' WITH 10 SX GEL & 50 SX CMT. PLUG AT 420' WITH 50 SX CMT. PLUG AT 60' WITH 25 SX CMT.

Plugging Proposal Received By: STEVE PFEIFER Witness Type: COMPLETE (100%)
Date/Time Plugging Completed: 09/24/2008 4:00 PM KCC Agent: STEVE PFEIFER

Actual Plugging Report:

SET CIBP @ 3960' & PUT 2 SX CMT ON TOP OF CIBP THROUGH DUMP BAILER. LAID DOWN CASING & RAN 2 3/8" TBG TO PLUG THROUGH. 1ST PLUG AT 880' WITH 15 SX GEL & 50 SX CMT. 2ND PLUG AT 420' WITH 50 SX CMT. 3RD PLUG AT 60' WITH 25 SX CMT.

Perfs:

Top	Bot	Thru	Comments
4537	4547		
4519	4529		
4406	4411		
4350	4356		
4310	4315		
4116	4124		
4050	4060		
4003	4007		
3968	3975		


INVOICED
DATE 10-29-08
INV. NO. 2009060633

RECEIVED
OCT 14 2008
KCC WICHITA

Remarks: USED 60/40 POZMIX 4% GEL BY ALLIED.

Plugged through: TBG

District: 01

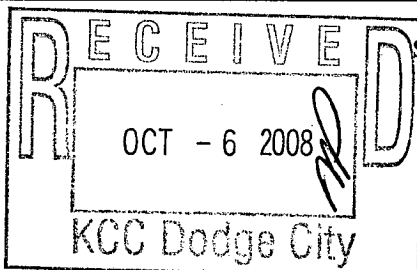

Signed

Stephen J. Pfeifer
(TECHNICIAN)