

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

*KCC PKT per OPS
he Reese*

API Well Number: 15-187-20185-00-00

Spot: W2W2E2SE

Sec/Twnshp/Rge: 36-30S-40W

1250 ~~1320~~ feet from S Section Line,

1472 ~~1250~~ feet from E Section Line

Lease Name: REESE GU

Well #: 2

County: STANTON

Total Vertical Depth: 2813 feet

Operator License No.: 5952

Op Name: BP AMERICA PRODUCTION COMPANY

Address: 2225 W OKLAHOMA AVE
ULYSSES, KS 67880

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	5.5	2813	0	WITH 800 SX CMT
SURF	8.625	600		WITH 385 SX CMT

91.42

Well Type: GAS

UIC Docket No:

Date/Time to Plug: 09/19/2008 9:00 AM

Plug Co. License No.: 32721

Plug Co. Name: ELDREDGE WELL SERVICE LLC

Proposal Rcvd. from: KEVIN STRUBE

Company: BP AMERICA PRODUCTION

Phone: (620) 356-1237

Proposed
Plugging
Method:

RUN TBG TO TOP OF FISH AT 1511'. FILL CASING WITH 210 SX CMT. CHRCK BACKSIDE.

Plugging Proposal Received By: JERRY W. STAPLETON

Witness Type: COMPLETE (100%)

Date/Time Plugging Completed: 09/19/2008 1:00 PM

KCC Agent: JACK MACCLASKEY

Actual Plugging Report:

****2 3/8" TBG & 5/8" RODS STUCK IN HOLE AT 1511** PUMP 200# HULLS & 186 SX CMT FROM 1511' TO SURFACE. PUMP 18 SX CMT DOWN 5 1/2" X 8 5/8" ANNULUS.**

Perfs:

Top	Bot	Thru	Comments
2638	2738		

INVOICED
DATE 10/30/08
INV. NO. 2009060646

RECEIVED
KANSAS CORPORATION COMMISSION


OCT 15 2008

CONSERVATION DIVISION
WICHITA, KS

Remarks: USED 60/40 POZMIX 4% GEL BY HALLIBURTON.

Plugged through: CSG

District: 01

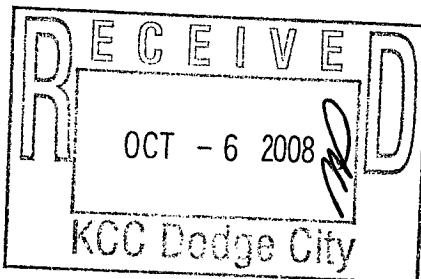

Signed

Jack d Macclasky
(TECHNICIAN)