

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-081-20666-00-01
Spot: NWNWNE Sec/Twnshp/Rge: 1-30S-31W
4974 feet from S Section Line, 2270 feet from E Section Line
Lease Name: WOOD-JACOBS Well #: 1-1
County: HASKELL Total Vertical Depth: 2807 feet

Operator License No.: 6230
Op Name: FIRST NATIONAL OIL, INC.
Address: PO BOX 2040
GARDEN CITY, KS 67846

String	Size	Depth (ft)	Pulled (ft)	Comments
CIBP		2595		WITH 2 SX CMT
PROD	5.5	2807	0	WITH 125 SX CMT <u>91.23</u>
SURF	8.625	822		WITH 400 SX CMT

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 09/25/2008 10:00 AM
Plug Co. License No.: 32721 Plug Co. Name: ELDREDGE WELL SERVICE LLC
Proposal Rcvd. from: RODNEY GONZALES Company: _____ Phone: _____

Proposed Plugging Method: PUMP 200# HULLS & 25 SX CMT. CIRCULATE CMT TO SURFACE AT 840'. PUMP 150 SX CMT DOWN BACKSIDE.

Plugging Proposal Received By: LINDLEY REIMER WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 09/26/2008 12:00 PM KCC Agent: JACK MACLASKEY

Actual Plugging Report:

CIBP @ 2595' WITH 2 SX CMT. PRESSURE TEST CASING TO 800#. PERFORATE 5 1/2" @ 840'. RIH WITH TBG PUMPED 100 SX CMT. GOOD CIRCULATION. TIED ONTO BACKSIDE & PUMPED 40 SX CMT. RAN OUT OF CMT. 9/26/08: TOC INSIDE 5 1/2" @ 290'. RIH WITH TBG & CIRCULATED CMT TO SURFACE WITH 50 SX CMT. TIED ONTO BACKSIDE & PUMPED 25 SX CMT.

Perfs:

Top	Bot	Thru	Comments
2656	2710		


INVOICED
DATE 10/30/08
INV. NO. 2009060650

RECEIVED
KANSAS CORPORATION COMMISSION
OCT 15 2008
CONSERVATION DIVISION
WICHITA, KS

Remarks: USED 60/40 POZMIX 4% GEL BY ALLIED.

Plugged through: TBG

District: 01

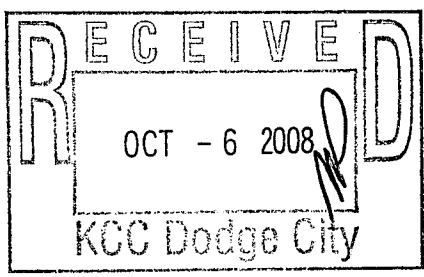

Signed Jack MacLaskey
(TECHNICIAN)

Form CR-26
PLS