

TO: STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-101-22126-00-00  
Spot: S2NWSESW Sec/Twnshp/Rge: 31-17S-30W  
825 feet from S Section Line, 3630 feet from E Section Line.  
Lease Name: DOYLE'S DOME Well #: 4  
County: LANE Total Vertical Depth: 4690 feet

Operator License No.: 34055  
Op Name: H & M PETROLEUM CORPORATION  
Address: 13570 MEADOWGRASS DR STE 101  
COLORADO SPGS, CO 80921

String	Size	Depth (ft)	Pulled (ft)	Comments
SURF	8.625	222		WITH 175 SX CMT

152.43

Well Type: DH UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 10/10/2008 2:00 PM  
Plug Co. License No.: 31120 Plug Co. Name: PELICAN HILL OIL & GAS, INC.  
Proposal Rcvd. from: BOB KLIESEN Company: PELICAN HILL OIL & GAS, INC. Phone: (713) 340-1212

Proposed Plugging Method: 1ST PLUG AT 2280' WITH 50 SX CMT. 2ND PLUG AT 1590' WITH 80 SX CMT. 3RD PLUG AT 780' WITH 50 SX CMT. 4TH PLUG AT 240' WITH 40 SX CMT. 5TH PLUG AT 60' WITH 20 SX CMT. 6TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. 7TH PLUG TO CIRCULATE MOUSE HOLE WITH 10 SX CMT.

Plugging Proposal Received By: JERRY W. STAPLETON WitnessType: NONE  
Date/Time Plugging Completed: 10/10/2008 4:45 PM KCC Agent: JERRY W. STAPLETON

Actual Plugging Report:

1ST PLUG AT 2280' WITH 50 SX CMT. 2ND PLUG AT 1590' WITH 80 SX CMT. 3RD PLUG AT 780' WITH 50 SX CMT. 4TH PLUG AT 240' WITH 40 SX CMT. 5TH PLUG AT 60' WITH 20 SX CMT. 6TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. 7TH PLUG TO CIRCULATE MOUSE HOLE WITH 10 SX CMT.

Perfs:


INVOICED  
DATE 11-3-08  
INV. NO. 2009060663

RECEIVED  
KANSAS CORPORATION COMMISSION  
OCT 17 2008  
CONSERVATION DIVISION  
WICHITA, KS

Remarks: USED 60/40 POZMIX 4% GEL 1/4# FLO SEAL BY SOS.

Plugged through: DP

District: 01

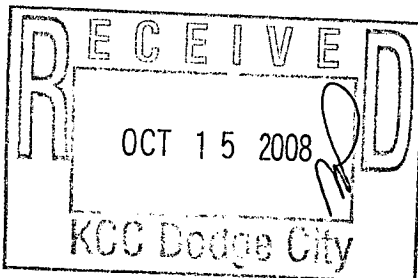

Signed

*Jerry W. Stapleton*  
PIRKT (TECHNICIAN)

*PLT*