

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Graham County. Sec. 13 Twp. 10S Rge. 25 (E) W (W)

Location as "NE/CNW%SW%" or footage from lines SW $\frac{1}{4}$ SW $\frac{1}{4}$ SW $\frac{1}{4}$

Lease Owner D. G. Hansen

Lease Name Knoll "A" Well No. 1

Office Address Logan, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) dry hole

Date well completed August 9 19 64

Application for plugging filed August 9 19 64

Application for plugging approved August 9 19 64


Plugging commenced August 9 19 64

Plugging completed August 10 19 64

Reason for abandonment of well or producing formation Too low structurally

If a producing well is abandoned, date of last production _____ 19 _____

Was permission obtained from the Conservation Division or its agents before plugging was commenced? _____

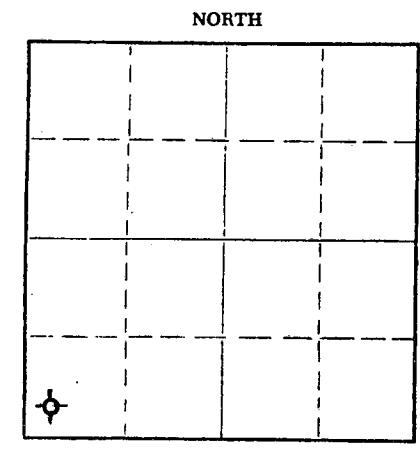

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well W L Nichols, Moreland, Kansas

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3976 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	184.29'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with heavy mud to 540'. Set plug. Put in 20 sx cement. Filled hole with heavy mud to 175'. Put in 20 sx cement, 1/2 sx hulls. Filled with heavy mud to 40' // Filled to top with 10 sx cement & 1/2 sx hulls. set plug

RECEIVED
STATE CORPORATION COMMISSION

AUG 24 1964

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor C-G Drilling Co.

Address 107 Rule Building, Wichita, Kansas

STATE OF Kansas COUNTY OF Sedgwick, ss.


Jay H. Galloway (employee of owner) or (~~owner~~) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Jay H. Galloway

107 Rule Bldg., Wichita, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 11th day of August, 19 64

My Commission expires May 20, 1967



Vicky Jacobs Notary Public.

WELL LOG

OPERATOR: D. G. HANSEN
 WELL NAME: KNOLL "A" #1 LOCATION: SW $\frac{1}{4}$ SW $\frac{1}{4}$ SW $\frac{1}{4}$ 13-10S-25W
 COUNTY: GRAHAM STATE: KANSAS
 WELL COMMENCED: 7/31/64 WELL COMPLETED: 8/10/64
 ELEVATION: 2019 K.B. TOTAL DEPTH: 3976'
 PRODUCTION: DRY & ABANDONED RIG NO: 1
 CASING - 8-5/8": 184.29' (9 jts.)
 5-1/2": _____

All Measurements taken from the top of rotary bushing.

FROM	TO	FORMATION	DEVIATION FROM VERTICAL	REMARKS:
0	184	Sand-Shale		
184	1110	Shale	500'- 1/2°	
1110	1200	Sand-Shale	1000'- 1/2°	
1200	1415	Shells-Shale		
1415	2015	Sand-Shale	1500'- 1/4°	
2015	2080	Shale		
2080	2120	Anhydrite	2500'- 1/4°	
2120	2380	Shells-Shale	3000'- 1/4°	
2380	3610	Lime-Shale	3500'- 3/4°	
3610	3976	Lime		

- #1 DST 3808-18'
- #2 DST 3867-88'
- #3 DST 3892-3920'
- #4 DST 3923-76'

RECEIVED
STATE CORPORATION COMMISSION

AUG 24 1964

CONSERVATION DIVISION
Wichita, Kansas

STATE OF KANSAS }
COUNTY OF SEDGWICK } SS: _____

The undersigned hereby certifies that to the best of his knowledge and belief, the above facts are true and correct.

C-G DRILLING CO.

By Jay H. Gentry
SUBSCRIBED AND SWORN TO, BEFORE ME, This 17th day of August, 1964.

Vicky Jacobs
Vicky Jacobs - Notary Public

