

15-065-20504-0000 JP

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

Graham County, Sec. 17 Twp. 10S Rge. (E) 25 (W)
Location as "NE/CNW/SW" or footage from lines SW NW SE
Lease Owner Abercrombie Drilling, Inc.
Lease Name BRUNGARDT Well No. 1
Office Address 801 Union Center, Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed January 14, 19 72
Application for plugging filed January 14, 19 72
Application for plugging approved January 14, 19 72
Plugging commenced January 14, 19 72
Plugging completed January 14, 19 72
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Bill Nichols
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4030 Feet

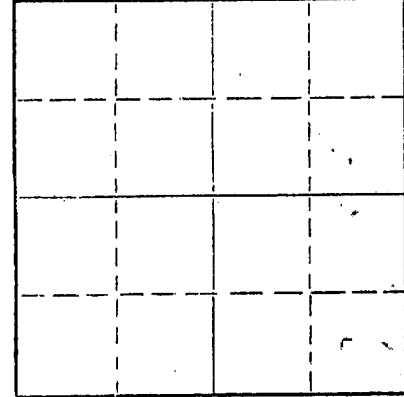

Locate well correctly on above Section Plat

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

1st plug set @1355' w/100 cu. ft. cement
2nd plug set @ 215' w/30 cu. ft. cement
Top plug set @ 43' w/10 cu. ft. cement
Job completed at 9:00 p.m. 1-14-72.

RECEIVED
STATE CORPORATION COMMISSION
JAN 18 1972
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Abercrombie Drilling, Inc.
Address 801 Union Center, Wichita, Kansas 67202

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
Jerry A. Langrehr (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Jerry A. Langrehr
801 Union Center, Wichita, Kansas 67202
(Address)

SUBSCRIBED AND SWORN TO before me this 17th day of January, 19 72

My commission expires February 10, 1975

Beverly Mann
Beverly Mann
Notary Public.

CONTRACTOR'S WELL LOG

OPERATOR:	Abercrombie Drilling, Inc.
CONTRACTOR:	Abercrombie Drilling, Inc.
WELL NAME:	BRUNGARDT #1
LOCATION:	SW NW SE, Sec. 17-10S-25W Graham County, Kansas
GEOLOGIST:	Jack K. Wharton
SPUD DATE:	January 7, 1972
COMPLETION DATE:	January 14, 1972

0	30	Clay
30	50	Flint & Sand
50	100	Clay
100	1220	Shale
1220	1366	Sand
1366	1731	Shale & Sand Streaks
1731	1900	Sand
1900	2136	Shale
2136	2176	Anhydrite
2176	2365	Shale
2365	2795	Shale & Lime
2795	3160	Lime & Shale
3160	3178	Shale
3178	3600	Lime & Shale
3600	4030	Lime
	4030	Rotary Total Depth

Drilled 210' of 12½" surface hole. Set 8-5/8" surface casing at 200' G.L. w/150 sx. Sunset cement. Cement circulated. Plug was down at 8:00 p.m. 1-7-72.
 Dry and Abandoned

SAMPLE TOPS

Anhydrite	2136 (+ 373)
B/Anhydrite	2176 (+ 333)
Heebner	3755 (-1246)
Toronto	3781 (-1272)
Lansing	3796 (-1287)
B/K.C.	4028 (-1519)

ELEVATION

2509 K.B.
 2507 D.F.
 2501 G.L.

RECEIVED
 STATE CORPORATION COMMISSION
 JAN 18 1972
 CONSERVATION DIVISION
 Wichita, Kansas

STATE OF KANSAS)
) SS
 COUNTY OF SEDGWICK)

Jerry A. Langrehr, President of Abercrombie Drilling, Inc., does hereby state that the above and foregoing is a true and correct copy of the log of the BRUNGARDT #1, SW NW SE, Section 17-10S-25W, Graham County, Kansas.

ABERCROMBIE DRILLING, INC.

By: Jerry A. Langrehr
 Jerry A. Langrehr
 President

Subscribed and sworn to before me, a Notary Public, in and for the aforesaid county and state as of this 17th day of January, 1972.

Beverly Mann
 Beverly Mann, Notary Public

My Commission Expires:

February 10, 1975