

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-151-21767-00-01
Spot: W2SWNW Sec/Twnshp/Rge: 9-27S-12W
3281 feet from S Section Line, 4949 feet from E Section Line
Lease Name: STUDER A Well #: 5
County: PRATT Total Vertical Depth: 4193 feet

Operator License No.: 3959
Op Name: SIROKY OIL MANAGEMENT
Address: PO BOX 464
PRATT, KS 67124

String	Size	Depth (ft)	Pulled (ft)	Comments
CIBP		3260		
PROD	4.5	4188	1640	WITH 75 SX CMT
SURF	10.75	236		WITH 275 SX CMT

Well Type: OG UIC Docket No: _____ Date/Time to Plug: 09/17/2008 9:00 AM
Plug Co. License No.: 33093 Plug Co. Name: GENESIS WELL SERVICE, INC.
Proposal Rcvd. from: EDGAR SANCHEZ Company: SIROKY OIL MGMT Phone: (620) 672-5625

Proposed Plugging Method: SAND 50' ABOVE PERFS & 4 SX CMT OR SET CIBP @ 4075' & 2 SX CMT. PLUG AT 750' WITH 10 SX GEL & 50 SX CMT. PLUG AT 260' WITH 75 SX CMT. PLUG AT 40' WITH 25 SX CMT

Plugging Proposal Received By: STEVE PFEIFER Witness Type: COMPLETE (100%)
Date/Time Plugging Completed: 09/18/2008 9:30 AM KCC Agent: STEVE PFEIFER

Actual Plugging Report:

SQUEEZE @ 3190'. SANDED BACK TO 2950' & PUT 4 SX CMT ON TOP OF SAND BRIDGE THROUGH DUMP BAILER. SPOTTED PLUGS THROUGH 4 1/2" CASING. 1ST PLUG AT 750' WITH 10 SX GEL & 50 SX CMT. 2ND PLUG AT 260' WITH 75 SX CMT. 3RD PLUG AT 40' WITH 25 SX CMT. LOST CIRCULATION ON 40' PLUG. SDON. TO LET CMT SET. 9/1/8/08: RUN TBG IN & TAG TOP OF CMT AT 130'. WAIT ON CMT. CIRCULATED CMT FROM 60' TO SURFACE WITH 30 SX COMMON CEMENT.

Perfs:


Top	Bot	Thru	Comments
4125	4150		MISSISSIPPI
3033	3037		

INVOICED
DATE 10-21-08
INV. NO. 2009060571

Remarks: USED 60/40 POZMIX 4% GEL BY BASIC ENERGY.

Plugged through: CSG

District: 01

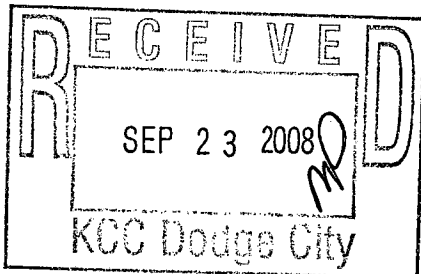

Signed

Stephen J. Pfeifer
(TECHNICIAN)

RECEIVED
KANSAS CORPORATION COMMISSION
Form CP-2/3

SEP 29 2008

CONSERVATION DIVISION
WICHITA, KS