

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-071-20658-00-00
Spot: W2NWNE Sec/Twnshp/Rge: 1-20S-40W
660 feet from N Section Line, 2310 feet from E Section Line
Lease Name: MEC ROBERTS Well #: 1-1
County: GREELEY Total Vertical Depth: 2840 feet

Operator License No.: 32920
Op Name: W. R. WILLIAMS, INC.
Address: PO BOX 15163
AMARILLO, TX 79105

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	4.5	2806	0	WITH 625 SX CMT
SURF	8.625	251		WITH 175 SX CMT <u>92.30</u>

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 09/19/2008 3:00 PM
Plug Co. License No.: 99996 Plug Co. Name: ALLIED CEMENT COMPANY
Proposal Rcvd. from: _____ Company: _____ Phone: _____

Proposed Plugging Method: FILL 4 1/2" CASING WITH CEMENT TO SURFACE. FILL 8 5/8" / 4 1/2" ANNULUS WITH CEMENT TO SURFACE.

Plugging Proposal Received By: STEVE DURRANT WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 09/19/2008 3:45 PM KCC Agent: STEVE DURRANT

Actual Plugging Report:

1ST PLUG HOOKED UP ALLIED CEMENTING AND TESTED 8 5/8" X 4 1/2" ANNULUS TO 500#. PUMPED 1/8 BBL OF WATER. 2ND PLUG HOOKED UP TO 4 1/2" CASING. MIXED & PUMPED 400# HULLS & 210 SX CMT. SHUT IN PRESSURE 500#.

Perfs:


Top	Bot	Thru	Comments
2822	2840		

INVOICED
DATE 10-21-08
INV. NO. 2009060575

Remarks: USED 60/40 POZMIX 4% GEL 1/4# FLO SEAL BY ALLIED.

Plugged through: CSG

District: 01

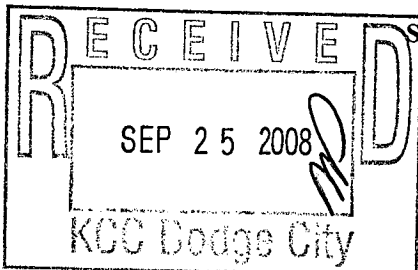

Signed

Steve Durrant

(TECHNICIAN)

RECEIVED
KANSAS CORPORATION COMMISSION
Form CP-2/3

SEP 29 2008

CONSERVATION DIVISION
WICHITA, KS

PKT