

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-129-20549-00-00

Spot: N2N2NW

Sec/Twnshp/Rge: 31-34S-43W

KCC Act per operator 475 feet from N Section Line, 1320 feet from W Section Line

Lease Name: RED CAVE SCHWEIZER Well #: 1

County: MORTON

Total Vertical Depth: 1319 feet

Operator License No.: 5156

Op Name: WHITE, EDGAR W.

Address: 701 VILYMACA ST PO BOX 450
ELKHART, KS 67950

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	4.5	1319	0	WITH 250 SX CMT
SURF	8.625	311		WITH 250 SX CMT 42.87

Well Type: GAS

UIC Docket No:

Date/Time to Plug: 09/09/2008 11:00 AM

Plug Co. License No.: 31151

Plug Co. Name: SARGENT AND HORTON PLUGGING, INC.

Proposal Rcvd. from: DON HORTON

Company: SARGENT AND HORTON PLUGGIN Phone: (580) 854-6515

Proposed Plugging Method: FILL WITH CMT. CHECK BACKSIDE.

Plugging Proposal Received By: STEVE DURRANT

WitnessType: COMPLETE (100%)

Date/Time Plugging Completed: 09/09/2008 1:00 PM

KCC Agent: KEN JEHLIK

Actual Plugging Report:

Perfs:

RAN WIRE LINE FLOAT & TAGGED FLUID LEVEL @ 843'. FILL 4 1/2" CASING FROM 1264' TO 0' USING 100# HULLS & 87 SX CMT. PRESSURE TO 500#. HOLDING. FILL 4 1/2" X 8 5/8" ANNULUS WITH 12 SX CMT. STAYED FULL.

INVOICED
DATE 10-17-08
INV. NO. 2009060533

RECEIVED
KANSAS CORPORATION COMMISSION


SEP 22 2008

CONSERVATION DIVISION
WICHITA, KS

Remarks: USED COMMON CEMENT BY SARGENTS.

Plugged through: CSG

District: 01

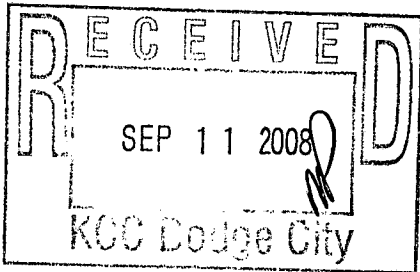

Signed

Ken Jehlik
(TECHNICIAN)