

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-101-21955-00-00
Spot: SWNWNE Sec/Twnshp/Rge: 35-18S-28W
990 feet from N Section Line, 2310 feet from E Section Line
Lease Name: SHAPLAND LIVING TRUST Well #: 2-35
County: LANE Total Vertical Depth: 4392 feet

Operator License No.: 33437
Op Name: SEDONA OIL & GAS CORPORATION
Address: 5646 MILTON STE 130
DALLAS, TX 75206

String	Size	Depth (ft)	Pulled (ft)	Comments
PC	5.5	1544		WITH 310 SX CMT
PROD	5.5	4385	0	WITH 150 SX CMT
SURF	8.625	266		WITH 180 SX CMT

142.74

Well Type: DH UIC Docket No: _____ Date/Time to Plug: 08/22/2008 10:00 AM
Plug Co. License No.: 32382 Plug Co. Name: SWIFT SERVICES, INC.
Proposal Rcvd. from: TED FUCHS Company: SWIFT SERVICES, INC. Phone: (785) 798-2300

Proposed Plugging Method: PUMP 35 SX CMT & 150# HULLS THE GEL SPACER TO SURFACE, THEN CMT TO SURFACE. 50 SX CMT FOR BACKSIDE.

Plugging Proposal Received By: STEVE DURRANT WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 08/22/2008 12:00 PM KCC Agent: MICHAEL MAIER

Actual Plugging Report:

PUMPED 35 SX CMT AND 250# HULLS - 14 SX GEL MIXED IN 42 BBL WATER - 175 SX CMT. MAXIMUM PRESSURE 1100#. SHUT IN PRESSURE 650#. TIED ONTO BACKSIDE & PRESSURED UP TO 500# WITH 1/4 BBL PUMPED.

Perfs:

Top	Bot	Thru	Comments
4288	4292		

INVOICED


DATE 10-16-08
INV. NO. 2009060509

RECEIVED
KANSAS CORPORATION COMMISSION
SEP 12 2008
CONSERVATION DIVISION
WICHITA, KS

Remarks: USED 60/40 POZMIX 4% GEL BY SWIFT SERVICES.

Plugged through: CSG

District: 01

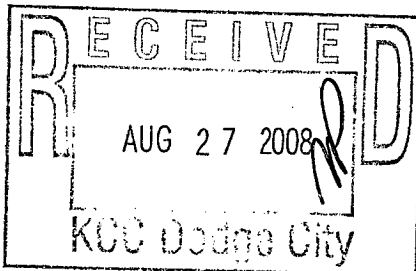

Signed

Michael Maier
(TECHNICIAN)

[Handwritten signature]