

15-065-02164-00.00

STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD


Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bitting Building  
Wichita, Kansas

Graham

County. Sec. 26 Twp. 10S Rge. (E) 24 (W)

Location as "NE/CNW/SW" or footage from lines SE NE NE  
Lease Owner Musgrove Petroleum Corporation  
Lease Name BILLINGS Well No. #1  
Office Address 518 Petroleum Building, Wichita, Kansas.  
Character of Well (completed as Oil, Gas or Dry Hole) Dry  
Date well completed October 1, 1955  
Application for plugging filed verbally - October 1, 1955  
Application for plugging approved verbally - October 1, 1955  
Plugging commenced October 1, 1955  
Plugging completed October 1, 1955  
Reason for abandonment of well or producing formation Dry

NORTH

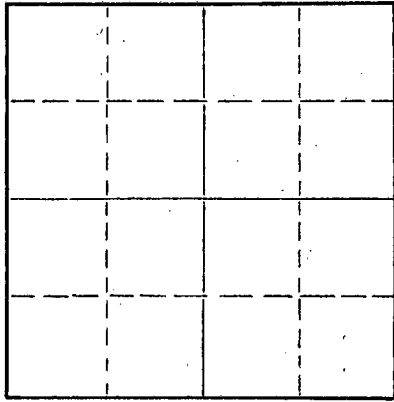

Locate well correctly on above  
Section Plat

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? verbally - yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3980 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	185'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.


Filled hole with heavy mud to 180'.  
1st plug set at 180' w/ wooden plug, 1/2 sk hulls, 15 sx cement.  
Filled hole with heavy mud to 40'.  
2nd plug set at 40' w/ wooden plug, 1/2 sk hulls, 15 sx cement.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Musgrove Petroleum Corporation  
Address 518 Petroleum Building, Wichita, Kansas.

STATE OF Kansas COUNTY OF Sedgwick  
I, Gordon L. Koelling (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Gordon L. Koelling  
518 Petroleum Building, Wichita, Kansas  
(Address)



SUBSCRIBED AND SWORN to before me this 10th day of October, 1955  
June 16, 1959 Leah Faye Hefke Notary Public.

PLUGGING  
FILE SEC 26 T10 R24  
BOOK PAGE 6 LINE 23

10-11-55  
DIVISION

CONTRACTOR'S WELL LOG

COMPANY: Musgrove Petroleum Corporation  
 CONTRACTOR: Musgrove Petroleum Corporation  
 FARM: BILLINGS #1  
 LOCATION: SE NE NE, Section 26-10S-24W  
 Graham County, Kansas  
 COMMENCED: September 21, 1955  
 COMPLETED: October 1, 1955

0	75	Surface soil & post rock
75	185	Shale & shells
185	420	Shale
420	1130	Shale & shells
1130	1410	Shale & lime streaks
1410	1540	Shale & shells
1540	1750	Sand
1750	1935	Shale & lime streaks
1935	2085	Lime & shale
2085	2350	Shale & lime streaks
2350	2845	Shale & lime
2845	2893	Lime
2893	3731	Shale & lime
3731	3805	Lime
3805	3850	Lime & shale
3850	3980	Lime
	3980	Rotary Total Depth

Set 8-5/8" surface casing at 185' w/135 sacks cement, 2% calcium chloride  
 Dry and Abandoned

ELEVATION:	2382' K. B.		
TOPS:		Toronto	3724' (-1342)
Topeka	3488' (-1106)	Lansing	3739' (-1357)
Heebner	3705' (-1323)	Base K. C.	3974' (-1592)

STATE OF KANSAS )  
 ) ) SS  
 COUNTY OF SEDGWICK )

I, GORDON L. KOELLING, do hereby certify that the above and foregoing is a true and correct copy of the log of the BILLINGS #1, SE NE NE, Section 26-10S-24W, Graham County, Kansas, as reflected by the files of the Musgrove Petroleum Corporation.


MUSGROVE PETROLEUM CORPORATION

BY *Gordon L. Koelling*  
 Gordon L. Koelling, Sec.-Treas

Subscribed and sworn to before me, a Notary Public, in and for Sedgwick County, Kansas, this 10th day of October, 1955.

*Leah Faye Herke*  
 Leah Faye Herke, Notary Public

My commission expires June 16, 1959.



**PLUGGING**  
 #1 SEC 26 T 10 R 24W  
 BOOK PAGE 6 LINE 23