

STATE OF KANSAS
STATE CORPORATION COMMISSION
200 Colorado Derby Bldg.
Wichita, Kansas 67202

Form CP-4
Rev. 12-15-80

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit

COUNTY Graham SEC. 35 TWP. 10S RGE. 25W E/W
Location as in quarters or footage from lines:
NW NW NE

| | | | |
|--|--|--|--|
| | | | |
| | | | |
| | | | |
| | | | |

Locate Well
correctly on above
Section Platt.

Lease Owner Graham-Michaelis Corp.
Lease Name KNOLL Well No. 1-35
Office Address 211 N. Broadway, Box 247, Wichita, KS 67202
Character of Well (Completed as Oil, Gas or Dry Hole): Dry Hole
Date Well Completed August 22, 1981
Application for plugging filed August 22, 1981
Plugging commenced August 22, 1981
Plugging completed August 22, 1981

Reason for abandonment of well or producing formation
No commercial quantity of oil or gas encountered.

Was permission obtained from the Conservation Division or it's
Agent's before plugging was commenced? YES

Name of Conservation Agent who supervised plugging of this well Gilbert Balthazar
Producing formation _____ Depth to top _____ bottom _____ T.D. 4074'

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS


Casing Record

| Formation | Content | From | To | Size | Put in | Pulled Out |
|-----------|---------|------|----|------|--------|------------|
| | | | | | | |
| | | | | | | |
| | | | | | | |

Describe in detail the manner in which the well was plugged, indicating where the mud
fluid was placed and the method or methods used in introducing it into the hold. If cement
or other plugs were used, state the character of same and depth placed, from _____ feet
to _____ feet for each plug set.

Set 1st plug @ 1180' with 60 sx.
Set 2nd plug @ 300' with 40 sx.
Set 3rd plug @ 40' with 10 sx.

Plug was down @ 3:15 a.m., 8/22/81.




(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Abercrombie Drilling, Inc.

STATE OF Kansas COUNTY OF Sedgwick, ss.
Jack L. Partridge, Vice Pres. (employee of owner) or (owner or operator) of the
above-described well, being first duly sworn on oath, says: That I have knowledge of the
facts, statements, and matters herein contained and the log of the above-described well as
filed and that the same are true and correct. So help me God.

(Signature) Jack L. Partridge
801. Union Cntr., Wichita, KS 67202
(Address)

SUBSCRIBED AND SWORN TO before me this 24th day of August, 19 81

My Commission expires: 7-13-85

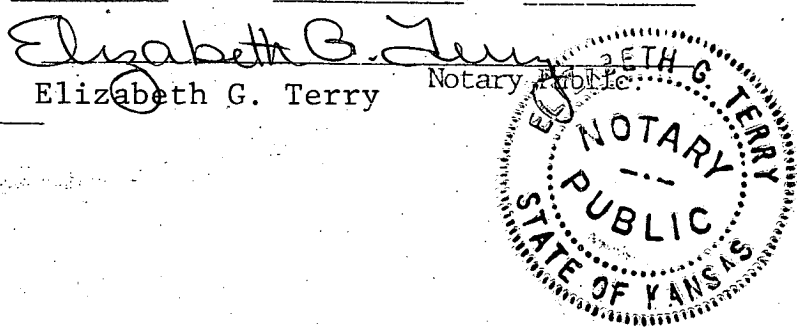

CONTRACTORS WELL LOG

OPERATOR: Graham-Michaelis Corp.
 CONTRACTOR: Abercrombie Drilling, Inc.
 WELL NAME: KNOLL #1-35
 LOCATION: NW NW NE, Sec. 35-10S-25W
 Graham County, Kansas
 SPUD DATE: 8/14/81
 COMPLETION DATE: 8/22/81

| | | |
|------|------|--------------------|
| 0 | 306 | Sand & Shale |
| 306 | 609 | Shale |
| 609 | 2130 | Shale & Sand |
| 2130 | 2175 | Anhydrite |
| 2175 | 2545 | Shale & Sand |
| 2545 | 3580 | Shale |
| 3580 | 3795 | Shale & Lime |
| 3795 | 4075 | Lime |
| | 4075 | Rotary Total Depth |

Spud hole @ 2:30 p.m., 8/14/81. Cur 306' of a 12 1/4" hole. Ran 7 jts. of 8 5/8" 23# casing, set @ 304' RTD. Cemented with 225 sx. common 3% c.c., 2% gel. Cement did circulate. Plug was down @ 7:30 p.m., 8/14/81.

4074' TD. Set 1st plug @ 1180' with 60 sx. Set 2nd plug @ 300' with 40 sx. Set 3rd plug @ 40' Solid Bridge with 10 sx. 5 sx. in Rathole, 50-50 posmix, 6% Gel. Plug was down @ 3:15 a.m., 8/22/81.

SAMPLE TOPS:

Anhydrite 2130'
 B/Anhydrite 2175'

STATE OF KANSAS)
) SS
 COUNTY OF SEDGWICK)

Jack L. Partridge, Vice President of Abercrombie Drilling, Inc., does hereby state that the above and foregoing is a true and correct copy of the log of the KNOLL #1-35, NW NW NE, Sec. 35-10S-25W, Graham County, Kansas.

ABERCROMBIE DRILLING, INC.

BY: Jack L. Partridge
 Jack L. Partridge, Vice Pres.

Subscribed and sworn to before me, a Notary Public, in and for the aforesaid county and state as of this 25th day of August, 1981.

my commission expires 7-13-85

RECEIVED Elizabeth G. Terry
 STATE CORPORATION
 Elizabeth G. Terry
 NOTARY PUBLIC
 AUG 26 1981
 CONSERVATION DIVISION
 Wichita, Kansas
 ELIZABETH G. TERRY
 NOTARY PUBLIC
 STATE OF KANSAS