


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Graham County, Sec. 23 Twp. 9S Rge. 23W E/W
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines
E/2 SW NW

Lease Owner DuPont Oil Company
Lease Name GODDARD Well No. 2
Office Address 660 Edgewater Road, Wichita, KS 67230
Character of Well (Completed as Oil, Gas or Dry Hole)
Dry Hole

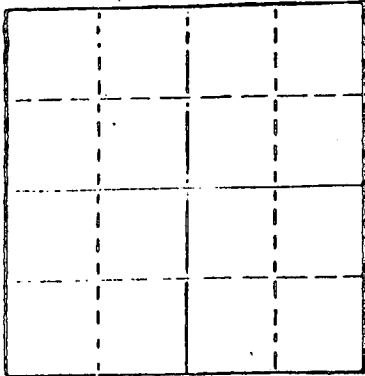

Locate well correctly on above
Section Plat

Date Well completed May 5 1980
Application for plugging filed (Verbally) May 5 1980
Application for plugging approved (Verbally) May 5 1980
Plugging commenced May 5 1980
Plugging completed May 5 1980

Reason for abandonment of well or producing formation
No commercial quantity of oil or gas encountered
If a producing well is abandoned, date of last production
19

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well
Producing formation Depth to top Bottom Total Depth of Well
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Set 1st plug at 950' with 60 sacks,
2nd plug at 240' with 30 sacks
3rd plug 40' solid bridge with 10 sacks,
followed by rathole with 5 sacks.

Plug was down at 8:30 a.m., 05-05-80.

RECEIVED
STATE CORPORATION COMMISSION

MAY 16 1980

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Abercrombie Drilling, Inc.

5-16-80

STATE OF Kansas COUNTY OF Sedgwick, ss.
Jack L. Partridge, Asst. Sec.-Treas. (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of
the facts, statements, and matters herein contained and the log of the above-described well
as filed and that the same are true and correct. So help me God.

(Signature) Jack L. Partridge
801 Union Center, Wichita, Kansas 67202
(Address)

SUBSCRIBED AND SWORN TO before me this 14th day of May, 1980



Sherrie L. Brooks
Notary Public.

My commission expires

15-065-21234-00.00

CONTRACTOR'S WELL LOG

OPERATOR:	DuPont Oil Company
CONTRACTOR:	Abercrombie Drilling, Inc.
WELL NAME:	GODDARD #2
LOCATION:	E/2 SW NW, Section 23-9S-23W, Graham County, Kansas
SPUD DATE:	04-29-80
COMPLETION DATE:	05-05-80

0	251	Sand & Shale
251	620	Shale
620	1890	Shale & Sand
1890	1968	Shale
1968	2003	Anhydrite
2003	2548	Shale
2548	3536	Shale & Lime
3536	3737	Lime & Shale
3737	3786	Shale & Lime
3786	3852	Lime
3852	3872	Shale & Lime
	3872	Rotary Table Depth

Spud hole at 2:30 p.m., 4-29-80. Drilled 251' of 12-1/4" hole. Ran 6 joints of 8-5/8" 20# new casing. (Tally 242') Set at 249' R.T.D. Cemented with 190 sacks common cement, 3% Ca.Cl., 2% gel. Cement did circulate. Plug was down at 6:30 p.m., 4-29-80.

T.D. 3920'. Set 1st plug at 950' with 60 sacks, 2nd plug at 240' with 30 sacks, 3rd plug 40' solid bridge with 10 sacks, and rathole with 5 sacks. Job complete at 8:30 a.m., 5-5-80.

SAMPLE TOPS:
 Anhydrite 1968' (+ 384)
 B/Anhydrite 2003' (+ 351)

RECEIVED
 STATE CORPORATION COMMISSION

MAY 16 1980

CONSERVATION DIVISION
 Topeka, Kansas

5-16-80

STATE OF KANSAS)
) SS
 COUNTY OF SEDGWICK)

Jack L. Partridge, Assistant Secretary-Treasurer of Abercrombie Drilling, Inc., does hereby state that the above and foregoing is a true and correct copy of the log of the GODDARD #2, E/2 SW NW, Section 23-9S-23W, Graham County, Kansas.

ABERCROMBIE DRILLING, INC.

BY: Jack L. Partridge
 Jack L. Partridge, Asst. Sec.-Treas.

Subscribed and sworn to before me, a Notary Public, in and for the aforesaid county and state as of this 14th day of May, 1980.

Sherrie L. Brooks
 Sherrie L. Brooks, Notary Public

