


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

NORTH



Locate well correctly on above
Section Plat

Sheridan County, Sec. 22 Twp. 10S Rge. 27W (E) (W)
Location as "NE/CNW/SW" or footage from lines. Approx. SW SW
Lease Owner W. A. Herman, etal
Lease Name Zerr Well No. #1
Office Address Box 797, Great Bend, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 5/21/69 19
Application for plugging filed 5/21/69 19
Application for plugging approved 5/21/69 19
Plugging commenced 5/21/69 19
Plugging completed 5/21/69 19
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well W. L. Nichols
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4027 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
	160 sacks 2% Gel	0	209'	8 5/8"		

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plug at 1185' through drill pipe with 100 sacks cement
Plug at 215' through drill pipe with 20 sacks cement
Plug at 40' through drill pipe with 10 sacks cement

RECEIVED
STATE CORPORATION COMMISSION
MAY 27 1969
CONSERVATION DIVISION
Wichita, Kansas
05-27-1969


(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor _____
Address _____

STATE OF KANSAS, COUNTY OF BARTON, ss. Jim Robinson (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Jim Robinson
Box 797, Great Bend, Kansas (Address)

Subscribed and sworn to before me this 26th day of May, 1969

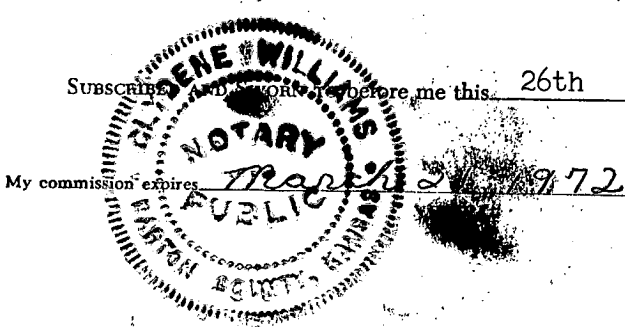

Clyde Williams
Clydene Williams Notary Public.

WELL LOG

CHIEF DRILLING CO., INC.
Box 797
Great Bend, Kansas 67530

15-179-20207-00-00

ZERR #1
Approx. SW SW
Sec. 22-10S-27W
Sheridan Co., Kansas

CONTRACTOR: W. A. Herman, et al

COMMENCED: 5-14-69

CASING RECORD: 8 5/8" set @ 209' w/160 sacks
2% Gel.

COMPLETED: 5-21-69

RECEIVED
STATE CORPORATION COMMISSION

MAY 27 1969
CONSERVATION DIVISION
Wichita, Kansas

05-27-1969

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>
Sand	0	70
Shale & sand	70	1600
Shale, shells, lime sand streaks	1600	1786
Sand	1786	1947
Red Bed & shale	1947	2145
Anhydrite	2145	2199
Sand & shell	2199	2330
Shale & shells	2330	2800
Shale & lime	2800	3770
Lime	3770	4030
T.D.	4030	

ELEVATION
2580 Gr.
2582 D.F.
2585 K.B.

FORMATION TOPS

Anhydrite	2145	+ 440
Topeka	3522	- 937
Heebner	3733	-1148
Toronto	3755	-1170
Lansing	3776	-1191

LOG TOPS

Anhydrite	2160	+ 425
Topeka	3509	- 924
Heebner	3725	-1140
Toronto	3746	-1161
Lansing	3770	-1185
Base K.C.	4008	-1423
Log T.D.	4019	-1434

STATE OF KANSAS, COUNTY OF BARTON) ss:

I hereby certify that the above is a true and correct copy of the Driller's Log of the well drilled in the SW SW of Section 22-10S-27W, Sheridan County, Kansas, to the best of my knowledge and belief.

CHIEF DRILLING CO., INC.

Jim Robinson
Jim Robinson, Office Manager

Subscribed and sworn to before me this 23rd day of May, 1969.

Carmen R. Cook
Carmen R. Cook, Notary Public

My Commission Expires: 12-12-1970

