


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

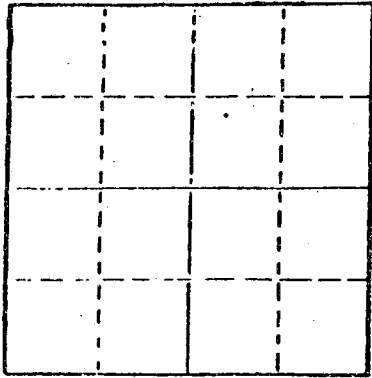

Locate well correctly on above Section Plat

Sheridan County, Sec. 1 Twp. 10S Rge. 29W E/W
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines
C NE SW NE

Lease Owner Hinkle Oil Company
Lease Name Heier Well No. 1
Office Address 1016 Union Center, Wichita, Kansas 67202
Character of Well (Completed as Oil, Gas or Dry Hole)
Dry Hole

Date Well completed June 17, 1980
Application for plugging filed June 17, 1980
Application for plugging approved June 17, 1980
Plugging commenced June 17, 1980
Plugging completed June 17, 1980
Reason for abandonment of well or producing formation
D Dry Hole

If a producing well is abandoned, date of last production
19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Gilbert Balthazor
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4,225'
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	297'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Mud to 1,000', 60 sx cement
Mud to 260', 30 sx cement
Mud to 40', plug, 1/4 sack hulls
10 sx cement 5 sx in rathole

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor _____

STATE OF Kansas COUNTY OF Sedgwick, ss.
Donald E. Hunt (employee of owner) or (owner or operator)

of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Donald E. Hunt
Suite 250, 200 West Douglas, Wichita, KS 67202
(Address)

SUBSCRIBED AND SWORN TO before me this 27th day of June, 1980

My Commission expires January 4, 1981

RECEIVED
Kathleen L. Greger
Notary Public.

JUN 30 1980
06-30-1980



15-179-20558-00-00

DRILLERS LOG

#1 HEIER
C NE SW NE Section 1-10S-29W
Sheridan County, Kansas

OPERATOR: HINKLE OIL COMPANY
1016 Union Center
Wichita, Kansas 67202

CONTRACTOR: DUNNE-GARDNER PETROLEUM, INC.
Suite 250, 200 West Douglas
Wichita, Kansas 67202

COMMENCED: June 11, 1980

COMPLETED: June 17, 1980

CASING RECORD: 8-5/8" @ 297' w/240 sx

<u>FROM</u>	<u>TO</u>	<u>DESCRIPTION</u>
0	297	Shale and sand
297	1290	Blue shale
1290	1322	Blaine
1322	1684	Red bed
1684	1902	Shale
1902	1953	Anhydrite
1953	2290	Shale and shells
2290	3990	Lime and shale
3990	4225	Lime
4225		Rotary total depth

STATE OF KANSAS)
) ss
COUNTY OF SEDGWICK)


I hereby certify that the above is a true and correct log to the best of my knowledge and belief.

Donald E. Hunt
Donald E. Hunt

Subscribed and sworn to before me this 27th day of June, 1980.

Kathleen L. Greger
Notary Public

My appointment expires:
January 24, 1981



RECEIVED
SHERIDAN COUNTY, KANSAS

JUN 30 1980
06-30-1960