

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-101-21145-00-01
Spot: SESENW Sec/Twnshp/Rge: 15-17S-29W
2927 feet from S Section Line, 2986 feet from E Section Line
Lease Name: SNIDER Well #: 1 SWD
County: LANE Total Vertical Depth: 4640 feet

Operator License No.: 31142
Op Name: PETROLEUM PROPERTY SERVICES, IN
Address: 125 N MARKET SUITE 1251
WICHITA, KS 67202

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	4.5	2195	0	WITH 400 SX CMT
SURF	8.625	335		WITH 200 SX CMT <u>150.80</u>

Well Type: SWD UIC Docket No: D24401.0 Date/Time to Plug: 10/07/2008 10:00 AM
Plug Co. License No.: 99996 Plug Co. Name: ALLIED CEMENT COMPANY
Proposal Rcvd. from: LEON KUHN Company: PETROLEUM PROPERTY SERVICE Phone: (785) 483-1559

Proposed Plugging Method: MIX 300# HULLS IN FIRST OF CMT & FILL CASING TILL PRESSURES UP. TIE ONTO BACKSIDE AND PUMP 50 SX CMT IF NEEDED.

Plugging Proposal Received By: MICHAEL MAIER WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 10/07/2008 11:30 AM KCC Agent: MICHAEL MAIER

Actual Plugging Report:

PUMPED 300# HULLS & 120 SX CMT DOWN CASING. PRESSURED TO 800#. SHUT IN PRESSURE 300#. TIED ONTO BACKSIDE & PUMPED 25 SX CMT. PRESSURED TO 500# & HELD.

Perfs:

Top	Bot	Thru	Comments
1800	2000		

INVOICED
DATE 11-13-08
INV. NO. 2009060731


RECEIVED
KANSAS CORPORATION COMMISSION
NOV 05 2008

Remarks: USED 60/40 POZMIX 4% GEL BY ALLIED.

Plugged through: CSG

CONSERVATION DIVISION
WICHITA, KS

District: 01

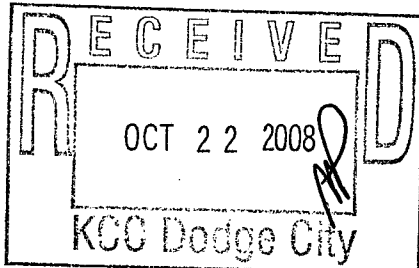

Signed

Michael Maier
(TECHNICIAN)

Form CP-2/3