


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 North Market, Insurance Bldg.
Wichita, Kansas

NORTH



Locate well correctly on above
Section Plat

Sheridan County. Sec. 24 Twp. 10S Rge. 28W (E) (W)
Location as "NE/CNW/SW" or footage from lines C NE SW SE
Lease Owner Imperial Oil of Kansas, Inc.
Lease Name Kinderknecht Well No. 1
Office Address 780 Fourth National Bldg., Wichita 2, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed January 27 19 60
Application for plugging filed January 27 19 60
Application for plugging approved January 27 19 60
Plugging commenced January 27 19 60
Plugging completed January 27 19 60
Reason for abandonment of well or producing formation No commercial quantities of oil found.
If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. Fabricius
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3985 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	210'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Set bottom plug at 500' with 20 sacks of cement; Second plug set at 200' with 20 sacks of cement; Top plug set at 40' with 10 sacks of cement.


STATE CORP. DIV. COMMISSION
2-19-60
FEB 19 1960

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor IMPERIAL OIL OF KANSAS, INC.
Address 780 Fourth National Bldg., Wichita 2, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
K. J. Boone (employee of IMPERIAL OIL OF KANSAS, INC. or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God IMPERIAL OIL OF KANSAS, INC.

(Signature) By: *K. J. Boone* Pet. Engr.
780 Fourth National Bldg., Wichita 2, Kansas (Address)

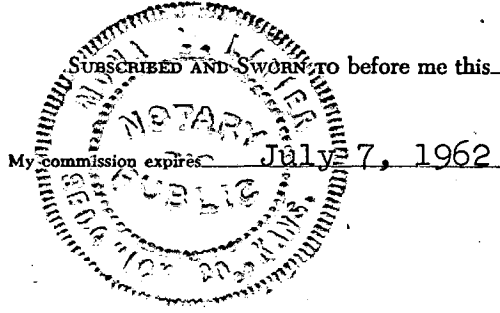

Mona L. Latier
Mona L. Latier Notary Public.

DRILLER'S LOG

RECEIVED
STATE CORPORATION COMMISSION

FEB 19 1960

CONSERVATION DIVISION
Wichita, Kansas

Imperial Oil of Kansas, Inc.
780 Fourth National Building
Wichita 2, Kansas

Kinderknecht No. 1
C NE ~~34~~ Sec. 24-10S-28W
Sheridan County, Kansas

Total Depth: 3985'

Elevation: 2625' RB
Production: D & A

Commenced: 1-8-60 Completed: 1-27-60

Contractor: Imperial Oil of Kansas, Inc.
Wichita 2, Kansas

Casing Record: Set 8-5/8" Surface Pipe at 210' with 200 sacks cement.

Figures indicate bottom of formations:

Surface Sand & Clay	210'
Shale-Shells-Sand	480'
Shale-Shells	1510'
Dak. Sand	1965'
Shale-Shells	2178'
Anhydrite	2213'
Shale-Shells	2630'
Lime-Shale	3207'
Lime	3215'
Shale-Lime	3710'
Lime	3985'
Rotary Total Depth	3985'

TOPS

Heebner	3716 (-1091)
Toronto	3737 (-1112)
Lansing	3947 (-1122)
Total Depth	3985 (-1360)

We hereby certify this to be a correct and accurate log of the above described well, as shown on the daily drilling reports.

IMPERIAL OIL OF KANSAS, INC.

By K. B. [Signature]

Subscribed and sworn to before me this 15th day of February, 1960.

My Commission Expires:

July 7, 1962

Mona L. Latier
Mona L. Latier, Notary Public

