


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

NORTH

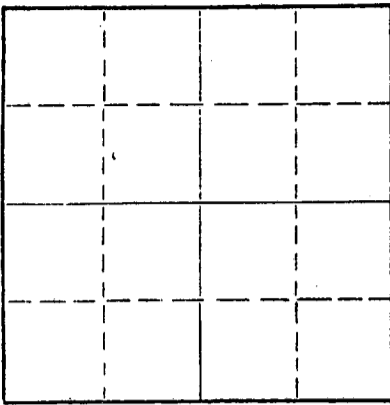

Locate well correctly on above
Section Plat

Sheridan County, Sec. 11 Twp. 10S Rge. 29 (E) W (W)

Location as "NE/CNW/SW" or footage from lines SW/4 SW/4

Lease Owner Koch Exploration Company

Lease Name Johnson "C" Well No. 1

Office Address P. O. Box 2256, Wichita, Kansas 67202

Character of Well (completed as Oil, Gas or Dry Hole) D & A

Date well completed November 10, 19 68

Application for plugging filed November 10, 19 68

Application for plugging approved November 10, 19 68

Plugging commenced November 10, 19 68

Plugging completed November 10, 19 68

Reason for abandonment of well or producing formation D & A

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well W. L. Nichols

Producing formation Depth to top Bottom Total Depth of Well 3706 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	270.44'	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Set plug @ 1400' cemented
with 100 sx. 50-50 poz.
6% gel. Set plug @ 275'
cemented with 205sx. 50-50
poz. 6% gel. Set plug @
40' cemented with 10 sx
50-50 poz 6% gel.

RECEIVED
STATE CORPORATION COMMISSION
DEC 13 1968
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Red Tiger Drilling Company

Address 1720 Wichita Plaza Building, Wichita, Kansas 67202

STATE OF Kansas, COUNTY OF Sedgwick, ss.

Norman E. Klein (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Norman E. Klein

1720 Wichita Plaza, Wichita, Kansas (Address)

Subscribed and sworn to before me this 20th day of November, 19 68

Jean Kollar Notary Public.



DRILLERS LOG

No. 1 Johnson "C"

CASING RECORD:	COMPANY:	Koch Exploration Co.	DESCRIPTION:
8 5/8" @ 277'	CONTRACTOR:	Red Tiger Drilling Co.	SW/4 SW/4
w/210 sx. cement	COMMENCED:	November 5, 1968	11-10S-29W
	COMPLETED:	November 10, 1968	Sheridan County, Kansas
TOTAL DEPTH: 3706'			ELEVATION:

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Shale & Sand Streaks	0	130	
Shale	130	1470	
Shale & Shells	1470	1980	
Blane	1980	2005	
Shale & Shells	2005	2423	
Anhydrite	2423	2460	
Red Bed & Shaie	2460	2640	
Shale & Lime	2640	2690	
Shale & Shells	2690	3230	
Shale & Lime	3230	3530	
Lime	3530	3606	
Lime & Shale	3606	3706	

RECEIVED
STATE CORPORATION COMMISSION
DEC 13 1968
CONSERVATION DIVISION
Wichita, Kansas

I certify that this is a true and correct copy of the above log to the best of my knowledge.

RED TIGER DRILLING COMPANY

Norman E. Klein
Norman E. Klein

Subscribed and sworn to before me this 20th day of November, 1968.

Dean Dallas
Notary Public



My Commission Expires:

12-31-70